


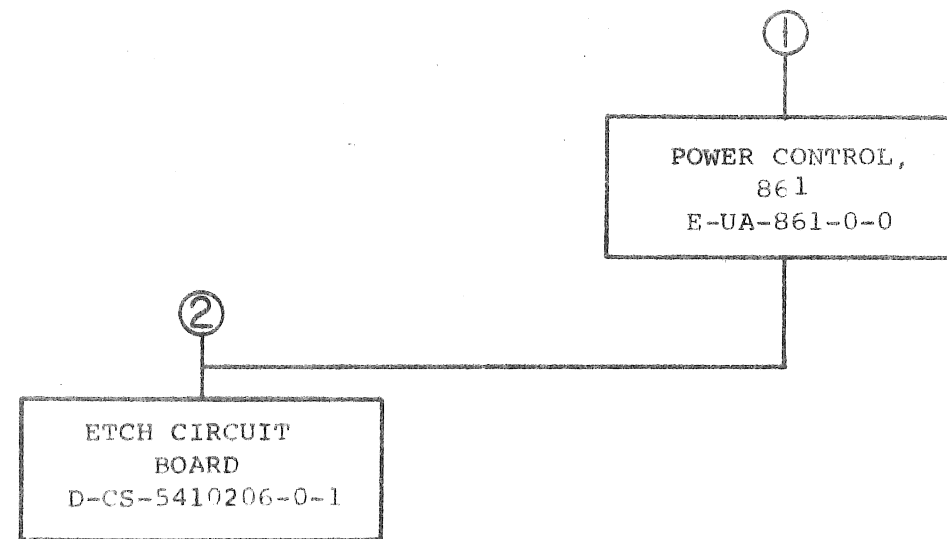

TITLE	SHEET 2 OF 3	SIZE CODE	NUMBER	REV
POWER CONTROL		B DD	861-0	A

CUSTOMER PRINT SET				ELECTRICAL					CUSTOMER PRINT SET				MECHANICAL								
861-1				MFG. SET	FIND NO.	DRAWING NO.	REV	NO OF SHT	DESCRIPTION	OPTION NO./FILE DATE	861-1				MFG. SET	FIND NO.	DRAWING NO.	REV	NO OF SHT	DESCRIPTION	OPTION NO./FILE DATE
X					1	D-CS-861-A-1		1	CIRCUIT SCHEMATIC, 861 P.C.		X					1	E-UA-861-0-0	B	2	POWER CONTROL, 861	
X						D-CS-861-B-1		1	CIRCUIT SCHEMATIC, 861 P.C.								E-IA-7410567-0-0		1	CHASSIS, 861 PC	
X						D-CS-861-C-1		1	CIRCUIT SCHEMATIC, 861 P.C.								D-IA-7410568-0-0		2	COVER, 861 P.C.	
						A-SP-861-0-1		2	TEST AND INSPECTION PRO.								A-PS-3611216-0-0			NAME PLATE 861-A	
																	C-SS-3611216-0-1		1	NAME PLATE 861-A ARTWORK	
																	A-PS-3611217-0-0			NAME PLATE 861-B	
																	C-SS-3611217-0-1		1	NAME PLATE 861-B ARTWORK	
																	A-PS-3611218-0-0			NAME PLATE 861-C	
X					2	D-CS-5410206-0-1	#	2	PILOT CONTROL								C-SS-3611218-0-1		1	NAME PLATE 861-C ARTWORK	
						PC-5010205-0-1		1	ETCH CIRCUIT BOARD												
						K-CO-5410206-0-4		1	X-Y COORDINATE HOLE LOCA.												
						D-AH-5410206-0-5		1	ASSY DRILLING HOLE LAYOUT												
						B-MH-5410206-0-6		1	MODULE ECO HISTORY												

CUSTOMER PRINT SET CODES

X = PRINT OF DOCUMENT INCLUDED IN PRINT SET

C = INCLUDES ALL PRINTS INDICATED ON DOCUMENT

S = CONFIDENTIAL AUTHORIZED SIGNATURE REQUIRED

TITLE

POWER CONTROL, 861

SHEET 3 OF 3

SIZE CODE


B DD

NUMBER

861-0








REV

A

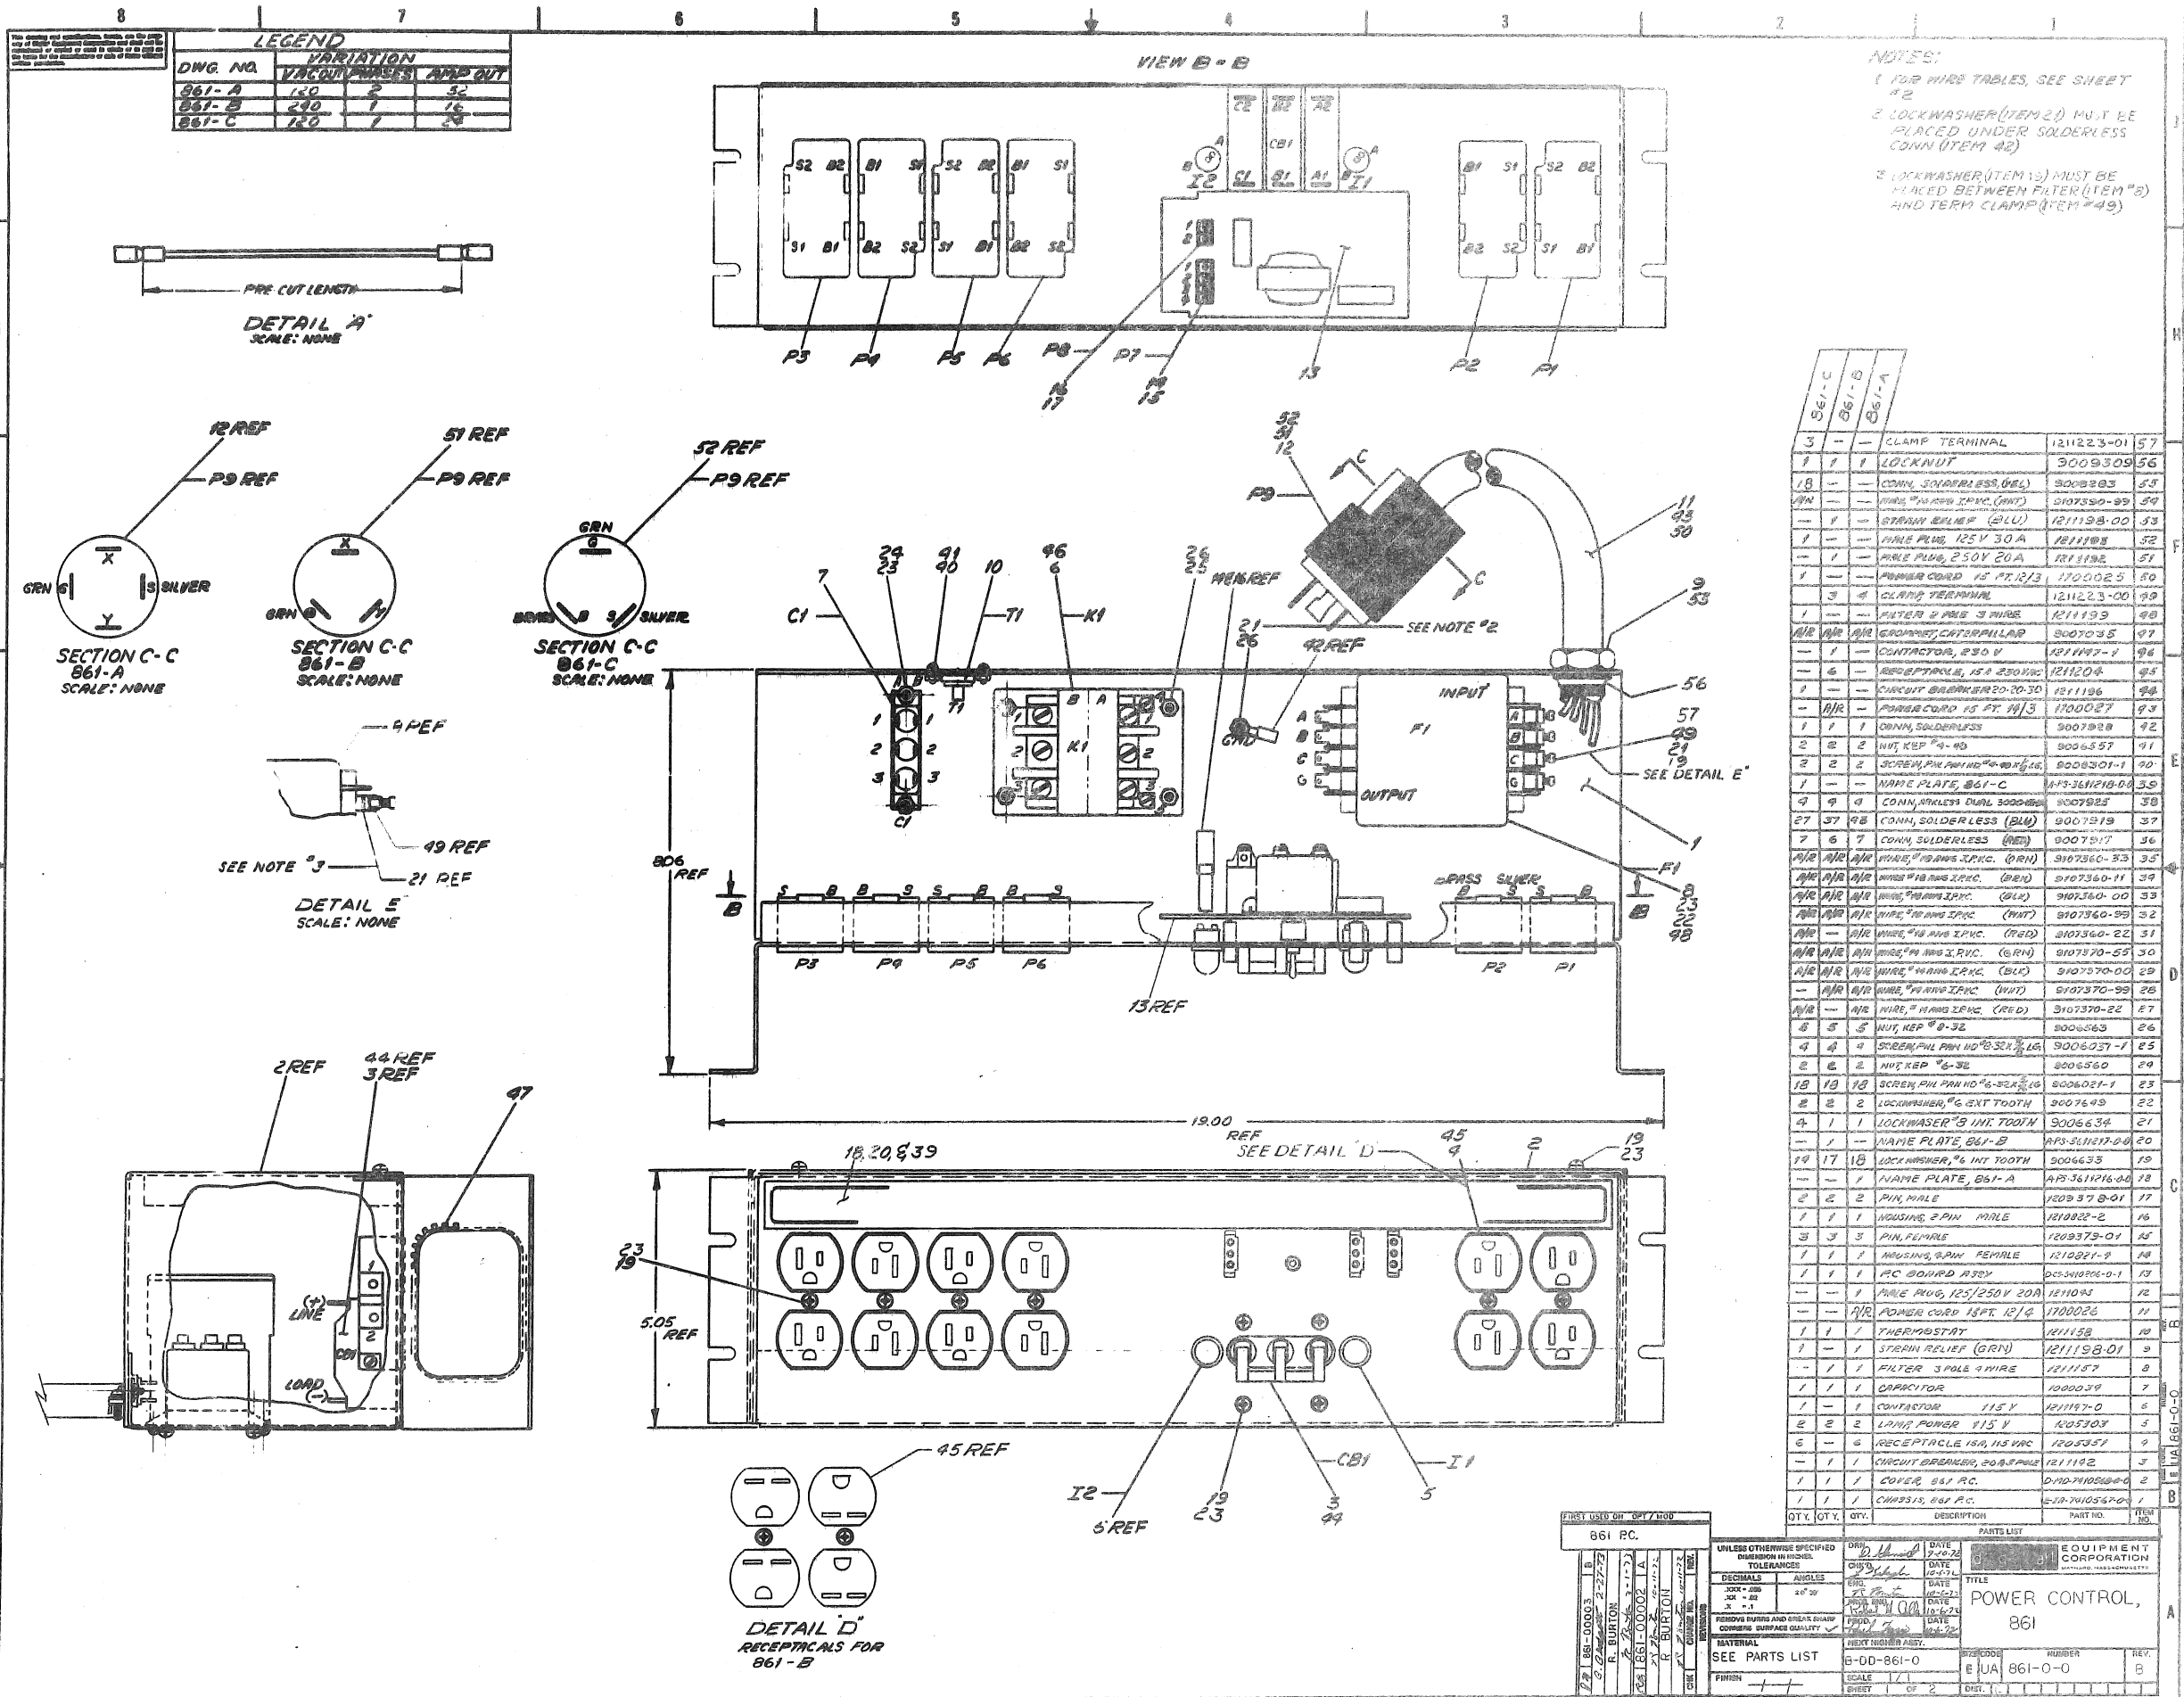

LEGEND			
DWG. NO.	VARIATION	QUANTITY	APPROX. QTY.
861-A	120	2	52
861-B	240	1	16
861-C	120	1	28

- NOTES:
- 1. FOR WIRE TABLES, SEE SHEET #2
 - 2. LOCKWASHER (ITEM 20) MUST BE PLACED UNDER SOLDERLESS CONN (ITEM 42)
 - 3. LOCKWASHER (ITEM 13) MUST BE PLACED BETWEEN FILTER (ITEM 2) AND TERM. CLAMP (ITEM 49)

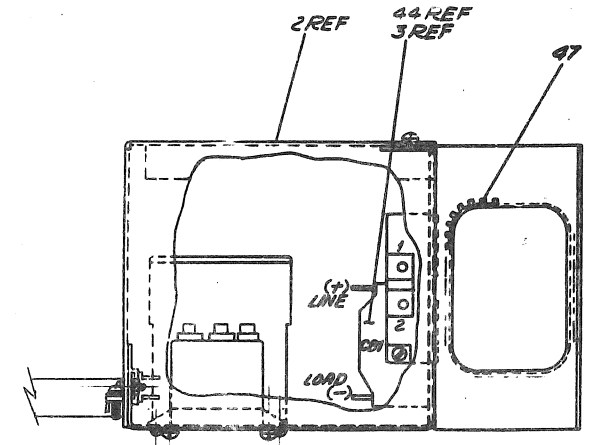

QTY.	QTY.	QTY.	DESCRIPTION	PART NO.	ITEM NO.
1	1	1	CLAMP TERMINAL	1211223-01	57
1	1	1	LOCKWASHER	3009309	56
18	1	1	CONN. SOLDERLESS (BLK)	3008303	55
18	1	1	CONN. SOLDERLESS (WHT)	3008300-99	54
1	1	1	STRAIN RELIEF (BLU)	1211198-00	53
1	1	1	WIRE PLUG, 125V 30A	1211198	52
1	1	1	WIRE PLUG, 250V 20A	1211192	51
1	1	1	POWER CORD 15 FT. 12/3	1700025	50
3	1	1	CLAMP TERMINAL	1211223-00	49
1	1	1	FILTER 2 POLE 3 WIRE	1211153	48
1	1	1	CONTRACTOR, 250V	3007035	47
1	1	1	RECEPTACLE, 15A 250VAC	1211204	46
1	1	1	CIRCUIT BREAKER 20-30	1211196	45
1	1	1	POWER CORD 15 FT. 14/3	1700027	44
1	1	1	CONN. SOLDERLESS	3007928	42
2	2	2	NUT, KEP #4-40	3006557	41
2	2	2	SCREW, PH. PAN #4-40	3006201-1	40
1	1	1	NAME PLATE, 861-C	121361218-00	39
4	4	4	CONN. SOLDERLESS DUAL 3000	3007925	38
27	27	27	CONN. SOLDERLESS (BLK)	3007919	37
7	7	7	CONN. SOLDERLESS (WHT)	3007917	36
1	1	1	WIRE, #18 AWG 3PNC. (GRN)	3107360-33	35
1	1	1	WIRE, #18 AWG 3PNC. (RED)	3107360-11	34
1	1	1	WIRE, #18 AWG 3PNC. (BLK)	3107360-00	33
1	1	1	WIRE, #18 AWG 3PNC. (WHT)	3107360-99	32
1	1	1	WIRE, #18 AWG 3PNC. (RED)	3107360-22	31
1	1	1	WIRE, #18 AWG 3PNC. (GRN)	3107370-59	30
1	1	1	WIRE, #18 AWG 3PNC. (BLK)	3107370-00	29
1	1	1	WIRE, #18 AWG 3PNC. (WHT)	3107370-99	28
1	1	1	WIRE, #18 AWG 3PNC. (RED)	3107370-22	27
8	8	8	NUT, KEP #8-32	3006563	26
4	4	4	SCREW, PH. PAN #8-32	3006037-1	25
2	2	2	NUT, KEP #8-32	3006560	24
18	18	18	SCREW, PH. PAN #8-32	3006021-1	23
2	2	2	LOCKWASHER, #6 EXT TOOTH	3007649	22
4	1	1	LOCKWASHER, #5 INT TOOTH	3006634	21
1	1	1	NAME PLATE, 861-B	121361217-00	20
19	17	17	LOCKWASHER, #6 INT TOOTH	3006633	19
1	1	1	NAME PLATE, 861-A	121361216-00	18
2	2	2	PIN, MALE	1209378-01	17
1	1	1	HOUSING, 2 PIN MALE	1218822-2	16
3	3	3	PIN, FEMALE	1209379-01	15
1	1	1	HOUSING, 2 PIN FEMALE	1218821-2	14
1	1	1	PC BOARD 13BY	003410206-0-1	13
1	1	1	WIRE PLUG, 125/250V 20A	1211193	12
1	1	1	POWER CORD 15FT. 12/3	1700026	11
1	1	1	THERMOSTAT	1211158	10
1	1	1	STRAIN RELIEF (GRN)	1211198-01	9
1	1	1	FILTER 3 POLE 4 WIRE	1211157	8
1	1	1	CAPACITOR	1000039	7
1	1	1	CONTACTOR 115V	1211197-0	6
2	2	2	LAMP, POWER 115V	1205303	5
6	6	6	RECEPTACLE 15A, 115VAC	1205351	4
1	1	1	CIRCUIT BREAKER, 20A 5-PHASE	1211192	3
1	1	1	COVER, 861 PC	003410206-0-2	2
1	1	1	CHASSIS, 861 PC	003410206-0-1	1

861 PC.		UNLESS OTHERWISE SPECIFIED		DATE: 7-26-72	
TOLERANCES:		DECIMALS: .0005		ANGLES: 30°	
MATERIAL:		SEE PARTS LIST		NEXT HIGHER ASSY.	
FINISH:		SEE PARTS LIST		SCALE: 1/2"	
PARTS LIST:		EQUIPMENT CORPORATION		TITLE: POWER CONTROL, 861	
REV. B		EUA 861-0-0		REV. B	


This drawing and specifications, when read in conjunction with the drawing of the equipment, constitute the complete set of instructions for the construction of the equipment. It is the responsibility of the contractor to ensure that the equipment is constructed in accordance with these instructions.

WIRE TABLE 861-A									
ITEM NO.	COLOR	AWG	CONN	FROM		TO	WITH	REMARKS	SEE DETAIL A
				POINT	POINT				
22	BLK	18	PI-B2	37	KI-A3	37	12.0		
23	BLK	18	PI-B1	36	KI-A3	36	12.0		
24	WHT	18	PI-S1	37	PI-S2	37	4.0		
25	WHT	18	PI-S2	37	KI-A2	37	12.0		
26	WHT	18	PI-S2	36	PI-S2	36	10.0		
27	RED	18	PI-B2	36	PI-S2	36	10.0		
28	WHT	18	PI-S1	37	KI-A1	37	12.0		
29	WHT	18	PI-S1	37	PI-S2	37	4.0		
30	WHT	18	PI-S2	37	PI-S2	37	6.0		
31	RED	18	PI-B1	37	PI-S2	37	4.0		
32	WHT	18	PI-S2	37	PI-S2	37	6.0		
33	BLK	18	PI-B1	37	PI-S2	37	4.0		
34	WHT	18	PI-S1	37	PI-S2	37	4.0		
35	BLK	18	PI-B2	37	PI-S2	37	4.0		
36	BLK	18	PI-B2	37	PI-S2	37	4.0		
37	BLK	18	PI-B2	37	PI-S2	37	4.0		
38	BLK	18	PI-B2	37	PI-S2	37	4.0		
39	BLK	18	PI-B2	37	PI-S2	37	4.0		
40	BLK	18	PI-B2	37	PI-S2	37	4.0		
41	BLK	18	PI-B2	37	PI-S2	37	4.0		
42	BLK	18	PI-B2	37	PI-S2	37	4.0		
43	BLK	18	PI-B2	37	PI-S2	37	4.0		
44	BLK	18	PI-B2	37	PI-S2	37	4.0		
45	BLK	18	PI-B2	37	PI-S2	37	4.0		
46	BLK	18	PI-B2	37	PI-S2	37	4.0		
47	BLK	18	PI-B2	37	PI-S2	37	4.0		
48	BLK	18	PI-B2	37	PI-S2	37	4.0		
49	BLK	18	PI-B2	37	PI-S2	37	4.0		
50	BLK	18	PI-B2	37	PI-S2	37	4.0		
51	BLK	18	PI-B2	37	PI-S2	37	4.0		
52	BLK	18	PI-B2	37	PI-S2	37	4.0		
53	BLK	18	PI-B2	37	PI-S2	37	4.0		
54	BLK	18	PI-B2	37	PI-S2	37	4.0		
55	BLK	18	PI-B2	37	PI-S2	37	4.0		
56	BLK	18	PI-B2	37	PI-S2	37	4.0		
57	BLK	18	PI-B2	37	PI-S2	37	4.0		
58	BLK	18	PI-B2	37	PI-S2	37	4.0		
59	BLK	18	PI-B2	37	PI-S2	37	4.0		
60	BLK	18	PI-B2	37	PI-S2	37	4.0		
61	BLK	18	PI-B2	37	PI-S2	37	4.0		
62	BLK	18	PI-B2	37	PI-S2	37	4.0		
63	BLK	18	PI-B2	37	PI-S2	37	4.0		
64	BLK	18	PI-B2	37	PI-S2	37	4.0		
65	BLK	18	PI-B2	37	PI-S2	37	4.0		
66	BLK	18	PI-B2	37	PI-S2	37	4.0		
67	BLK	18	PI-B2	37	PI-S2	37	4.0		
68	BLK	18	PI-B2	37	PI-S2	37	4.0		
69	BLK	18	PI-B2	37	PI-S2	37	4.0		
70	BLK	18	PI-B2	37	PI-S2	37	4.0		
71	BLK	18	PI-B2	37	PI-S2	37	4.0		
72	BLK	18	PI-B2	37	PI-S2	37	4.0		
73	BLK	18	PI-B2	37	PI-S2	37	4.0		
74	BLK	18	PI-B2	37	PI-S2	37	4.0		
75	BLK	18	PI-B2	37	PI-S2	37	4.0		
76	BLK	18	PI-B2	37	PI-S2	37	4.0		
77	BLK	18	PI-B2	37	PI-S2	37	4.0		
78	BLK	18	PI-B2	37	PI-S2	37	4.0		
79	BLK	18	PI-B2	37	PI-S2	37	4.0		
80	BLK	18	PI-B2	37	PI-S2	37	4.0		
81	BLK	18	PI-B2	37	PI-S2	37	4.0		
82	BLK	18	PI-B2	37	PI-S2	37	4.0		
83	BLK	18	PI-B2	37	PI-S2	37	4.0		
84	BLK	18	PI-B2	37	PI-S2	37	4.0		
85	BLK	18	PI-B2	37	PI-S2	37	4.0		
86	BLK	18	PI-B2	37	PI-S2	37	4.0		
87	BLK	18	PI-B2	37	PI-S2	37	4.0		
88	BLK	18	PI-B2	37	PI-S2	37	4.0		
89	BLK	18	PI-B2	37	PI-S2	37	4.0		
90	BLK	18	PI-B2	37	PI-S2	37	4.0		
91	BLK	18	PI-B2	37	PI-S2	37	4.0		
92	BLK	18	PI-B2	37	PI-S2	37	4.0		
93	BLK	18	PI-B2	37	PI-S2	37	4.0		
94	BLK	18	PI-B2	37	PI-S2	37	4.0		
95	BLK	18	PI-B2	37	PI-S2	37	4.0		
96	BLK	18	PI-B2	37	PI-S2	37	4.0		
97	BLK	18	PI-B2	37	PI-S2	37	4.0		
98	BLK	18	PI-B2	37	PI-S2	37	4.0		
99	BLK	18	PI-B2	37	PI-S2	37	4.0		
100	BLK	18	PI-B2	37	PI-S2	37	4.0		

WIRE TABLE 861-B									
ITEM NO.	COLOR	AWG	CONN	FROM		TO	WITH	REMARKS	SEE DETAIL A
				POINT	POINT				
29	BLK	18	PI-B2	37	KI-A3	37	12.0		
28	WHT	18	PI-S1	37	PI-S2	37	4.0		
27	WHT	18	PI-S2	37	KI-A2	37	12.0		
26	WHT	18	PI-S2	36	PI-S2	36	10.0		
25	WHT	18	PI-S1	37	PI-S2	37	4.0		
24	WHT	18	PI-S2	37	PI-S2	37	6.0		
23	BLK	18	PI-B1	37	PI-S2	37	4.0		
22	WHT	18	PI-S1	37	PI-S2	37	4.0		
21	WHT	18	PI-S2	37	PI-S2	37	6.0		
20	WHT	18	PI-S1	37	PI-S2	37	4.0		
19	BLK	18	PI-B2	37	PI-S2	37	4.0		
18	WHT	18	PI-S1	37	PI-S2	37	4.0		
17	WHT	18	PI-S2	37	PI-S2	37	6.0		
16	BLK	18	PI-B1	37	PI-S2	37	4.0		
15	WHT	18	PI-S1	37	PI-S2	37	4.0		
14	WHT	18	PI-S2	37	PI-S2	37	6.0		
13	BLK	18	PI-B1	37	PI-S2	37	4.0		
12	WHT	18	PI-S1	37	PI-S2	37	4.0		
11	WHT	18	PI-S2	37	PI-S2	37	6.0		
10	BLK	18	PI-B1	37	PI-S2	37	4.0		
9	WHT	18	PI-S1	37	PI-S2	37	4.0		
8	WHT	18	PI-S2	37	PI-S2	37	6.0		
7	BLK	18	PI-B1	37	PI-S2	37	4.0		
6	WHT	18	PI-S1	37	PI-S2	37	4.0		
5	WHT	18	PI-S2	37	PI-S2	37	6.0		
4	BLK	18	PI-B1	37	PI-S2	37	4.0		
3	WHT	18	PI-S1	37	PI-S2	37	4.0		
2	WHT	18	PI-S2	37	PI-S2	37	6.0		
1	BLK	18	PI-B1	37	PI-S2	37	4.0		
0	WHT	18	PI-S1	37	PI-S2	37	4.0		
-1	WHT	18	PI-S2	37	PI-S2	37	6.0		
-2	BLK	18	PI-B1	37	PI-S2	37	4.0		
-3	WHT	18	PI-S1	37	PI-S2	37	4.0		
-4	WHT	18	PI-S2	37	PI-S2	37	6.0		
-5	BLK	18	PI-B1	37	PI-S2	37	4.0		
-6	WHT	18	PI-S1	37	PI-S2	37	4.0		
-7	WHT	18	PI-S2	37	PI-S2	37	6.0		
-8	BLK	18	PI-B1	37	PI-S2	37	4.0		
-9	WHT	18	PI-S1	37	PI-S2	37	4.0		
-10	WHT	18	PI-S2	37	PI-S2	37	6.0		
-11	BLK	18	PI-B1	37	PI-S2	37	4.0		
-12	WHT	18	PI-S1	37	PI-S2	37	4.0		
-13	WHT	18	PI-S2	37	PI-S2	37	6.0		
-14	BLK	18	PI-B1	37	PI-S2	37	4.0		
-15	WHT	18	PI-S1	37	PI-S2	37	4.0		
-16	WHT	18	PI-S2	37	PI-S2	37	6.0		
-17	BLK	18	PI-B1	37	PI-S2	37	4.0		
-18	WHT	18	PI-S1	37	PI-S2	37	4.0		
-19	WHT	18	PI-S2	37	PI-S2	37	6.0		
-20	BLK	18	PI-B1	37	PI-S2	37	4.0		
-21	WHT	18	PI-S1	37	PI-S2	37	4.0		
-22	WHT	18	PI-S2	37	PI-S2	37	6.0		
-23	BLK	18	PI-B1	37	PI-S2	37	4.0		
-24	WHT	18	PI-S1	37	PI-S2	37	4.0		
-25	WHT	18	PI-S2	37	PI-S2	37	6.0		
-26	BLK	18	PI-B1	37	PI-S2	37	4.0		
-27	WHT	18	PI-S1	37	PI-S2	37	4.0		
-28	WHT	18	PI-S2	37	PI-S2	37	6.0		
-29	BLK	18	PI-B1	37	PI-S2	37	4.0		
-30	WHT	18	PI-S1	37	PI-S2	37	4.0		
-31	WHT	18	PI-S2	37	PI-S2	37	6.0		
-32	BLK	18	PI-B1	37	PI-S2	37	4.0		
-33	WHT	18	PI-S1	37	PI-S2	37	4.0		
-34	WHT	18	PI-S2	37	PI-S2	37	6.0		
-35	BLK	18	PI-B1	37	PI-S2	37	4.0		
-36	WHT	18	PI-S1	37	PI-S2	37	4.0		
-37	WHT	18	PI-S2	37	PI-S2	37	6.0		
-38	BLK	18	PI-B1	37	PI-S2	37	4.0		
-39	WHT	18	PI-S1	37	PI-S2	37	4.0		
-40	WHT	18	PI-S2	37	PI-S2	37	6.0		
-41	BLK	18	PI-B1	37	PI-S2	37	4.0		
-42	WHT	18	PI-S1	37	PI-S2	37	4.0		
-43	WHT	18	PI-S2	37	PI-S2	37	6.0		
-44	BLK	18	PI-B1	37	PI-S2	37	4.0		
-45	WHT	18	PI-S1	37	PI-S2	37	4.0		
-46	WHT	18	PI-S2	37	PI-S2	37	6.0		
-47	BLK	18	PI-B1	37	PI-S2	37	4.0		
-48	WHT	18	PI-S1	37	PI-S2	37	4.0		
-49	WHT	18	PI-S2	37	PI-S2	37	6.0		
-50	BLK	18	PI-B1	37	PI-S2	37	4.0		
-51	WHT	18	PI-S1	37	PI-S2	37	4.0		
-52	WHT	18	PI-S2	37	PI-S2	37	6.0		
-53	BLK	18	PI-B1	37	PI-S2	37	4.0		
-54	WHT	18	PI-S1	37	PI-S2	37	4.0		

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

NOTES:

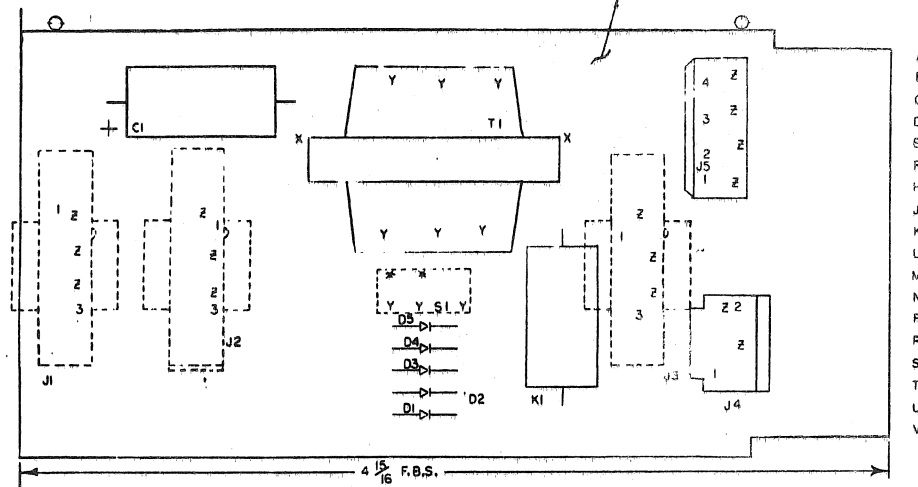

QTY	REF DESIGNATION	DESCRIPTION	PART NO.	ITEM NO.
1	S1	SWITCH, 3-POS.	12-11180	14
1	K1	RELAY, REED	12-11179	13
1	T1	PC TRANSFORMER	16-11178	12
4	FOR USE ON J5	PIN, PC MALE MATE-N-LOCK	1210823	11
1	J9	SOCKET, 2 PIN MATE-N-LOCK	1210824-02	10
11	FOR USE ON J1-J8	PIN, PC FEMALE MATE-N-LOCK	1209956	9
1	J5	PLUG, 4 PIN MATE-N-LOCK	1209351-04	8
3	J1, J2, J3	SOCKET, 3 PIN MATE-N-LOCK	1209350-03	7
5	D1-D5	DIODE, 1N 4004	1105796	6
1	C1	CAP, 50UF, 50V 6% AL EL	1000880	5
REF		MODULE ECO HISTORY	B.M.H. 5910206-0-5	4
REF		ASSY DRILLING HOLE LAYOUT	D.A.H. 5910206-0-5	3
REF		X-Y COORDINATE HOLE LOCA.	K.C.O. 5910206-0-5	2
1		ETC CKT BOARD	5010205	1

FIRST USED ON OPTION MODEL

861 PC.

ETCH BOARD REV

B

PARTS LIST

DRN. *D. Shurt* DATE 8-25-72
CHK'D. *R. Shurt* DATE 9-17-72
ENG. *R. Shurt* DATE 9-19-72
PROJ. ENG. *R. Shurt* DATE 9-19-72
PROD. *R. Shurt* DATE 9-20-72
NEXT HIGHER ASSY

digital EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

PILOT CONTROL

SIZE CODE NUMBER REV.
D CS 5410206-0-1 A

DEC NO. EIA NO. DEC NO. EIA NO.

SEMICONDUCTOR CONVERSION CHART


SCALE 2/1

SHEET OF 2


DIST.

BRUING 40522 16599

DEC FORM NO. DRD-125A

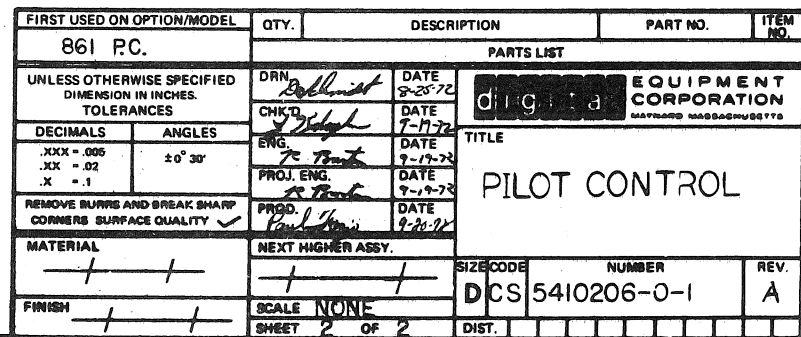


This drawing and specifications herein are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

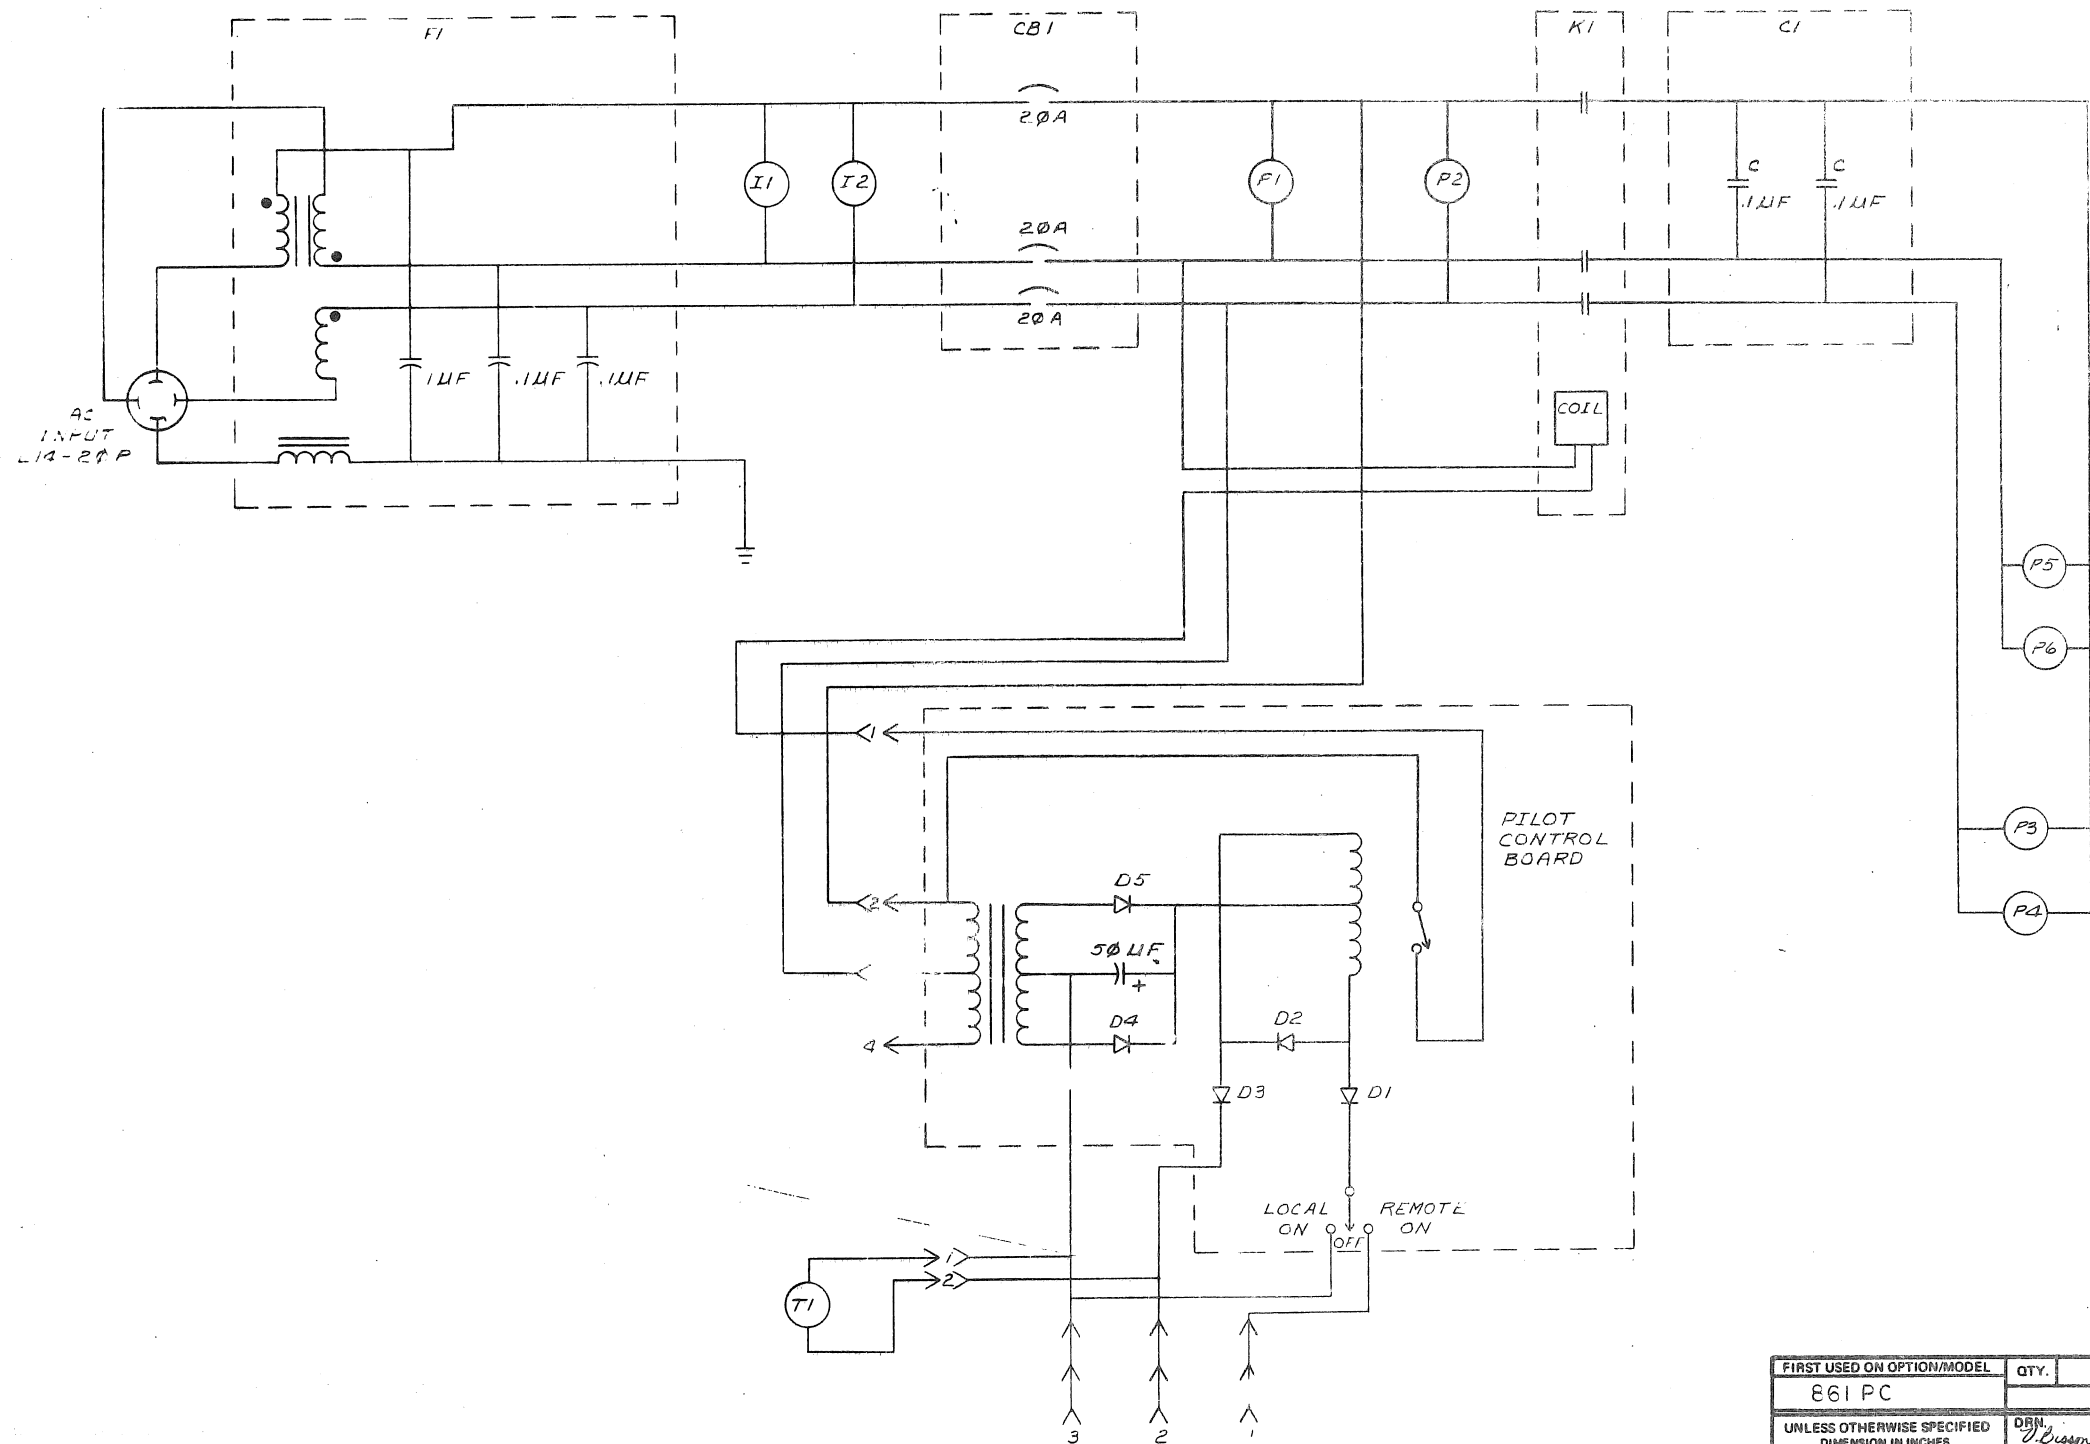


FIRST USED ON OPTION/MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
861 PC					
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES. TOLERANCES		PARTS LIST			
DECIMALS	ANGLES	DATE	digital EQUIPMENT CORPORATION MAYNARD, MASSACHUSETTS		
.XXX = .005	±0° 30'	9-11-72			
.XX = .02		10-6-72			
.X = .1		11-4-72			
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		DATE	CIRCUIT SCHEMATIC (861-A PC)		
		11-4-72			
		11-4-72			
		11-4-72			
MATERIAL		NEXT HIGHER ASSY.		SIZE CODE	NUMBER
FINISH		SCALE		D CS	861-A-1
		SHEET		DIST.	REV.

BRUNING 40107 15568
DEC FORM NO
ORD 100-A

This drawing and specifications, herein, are the property of Digital Equipment Corporation and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of items without written permission.

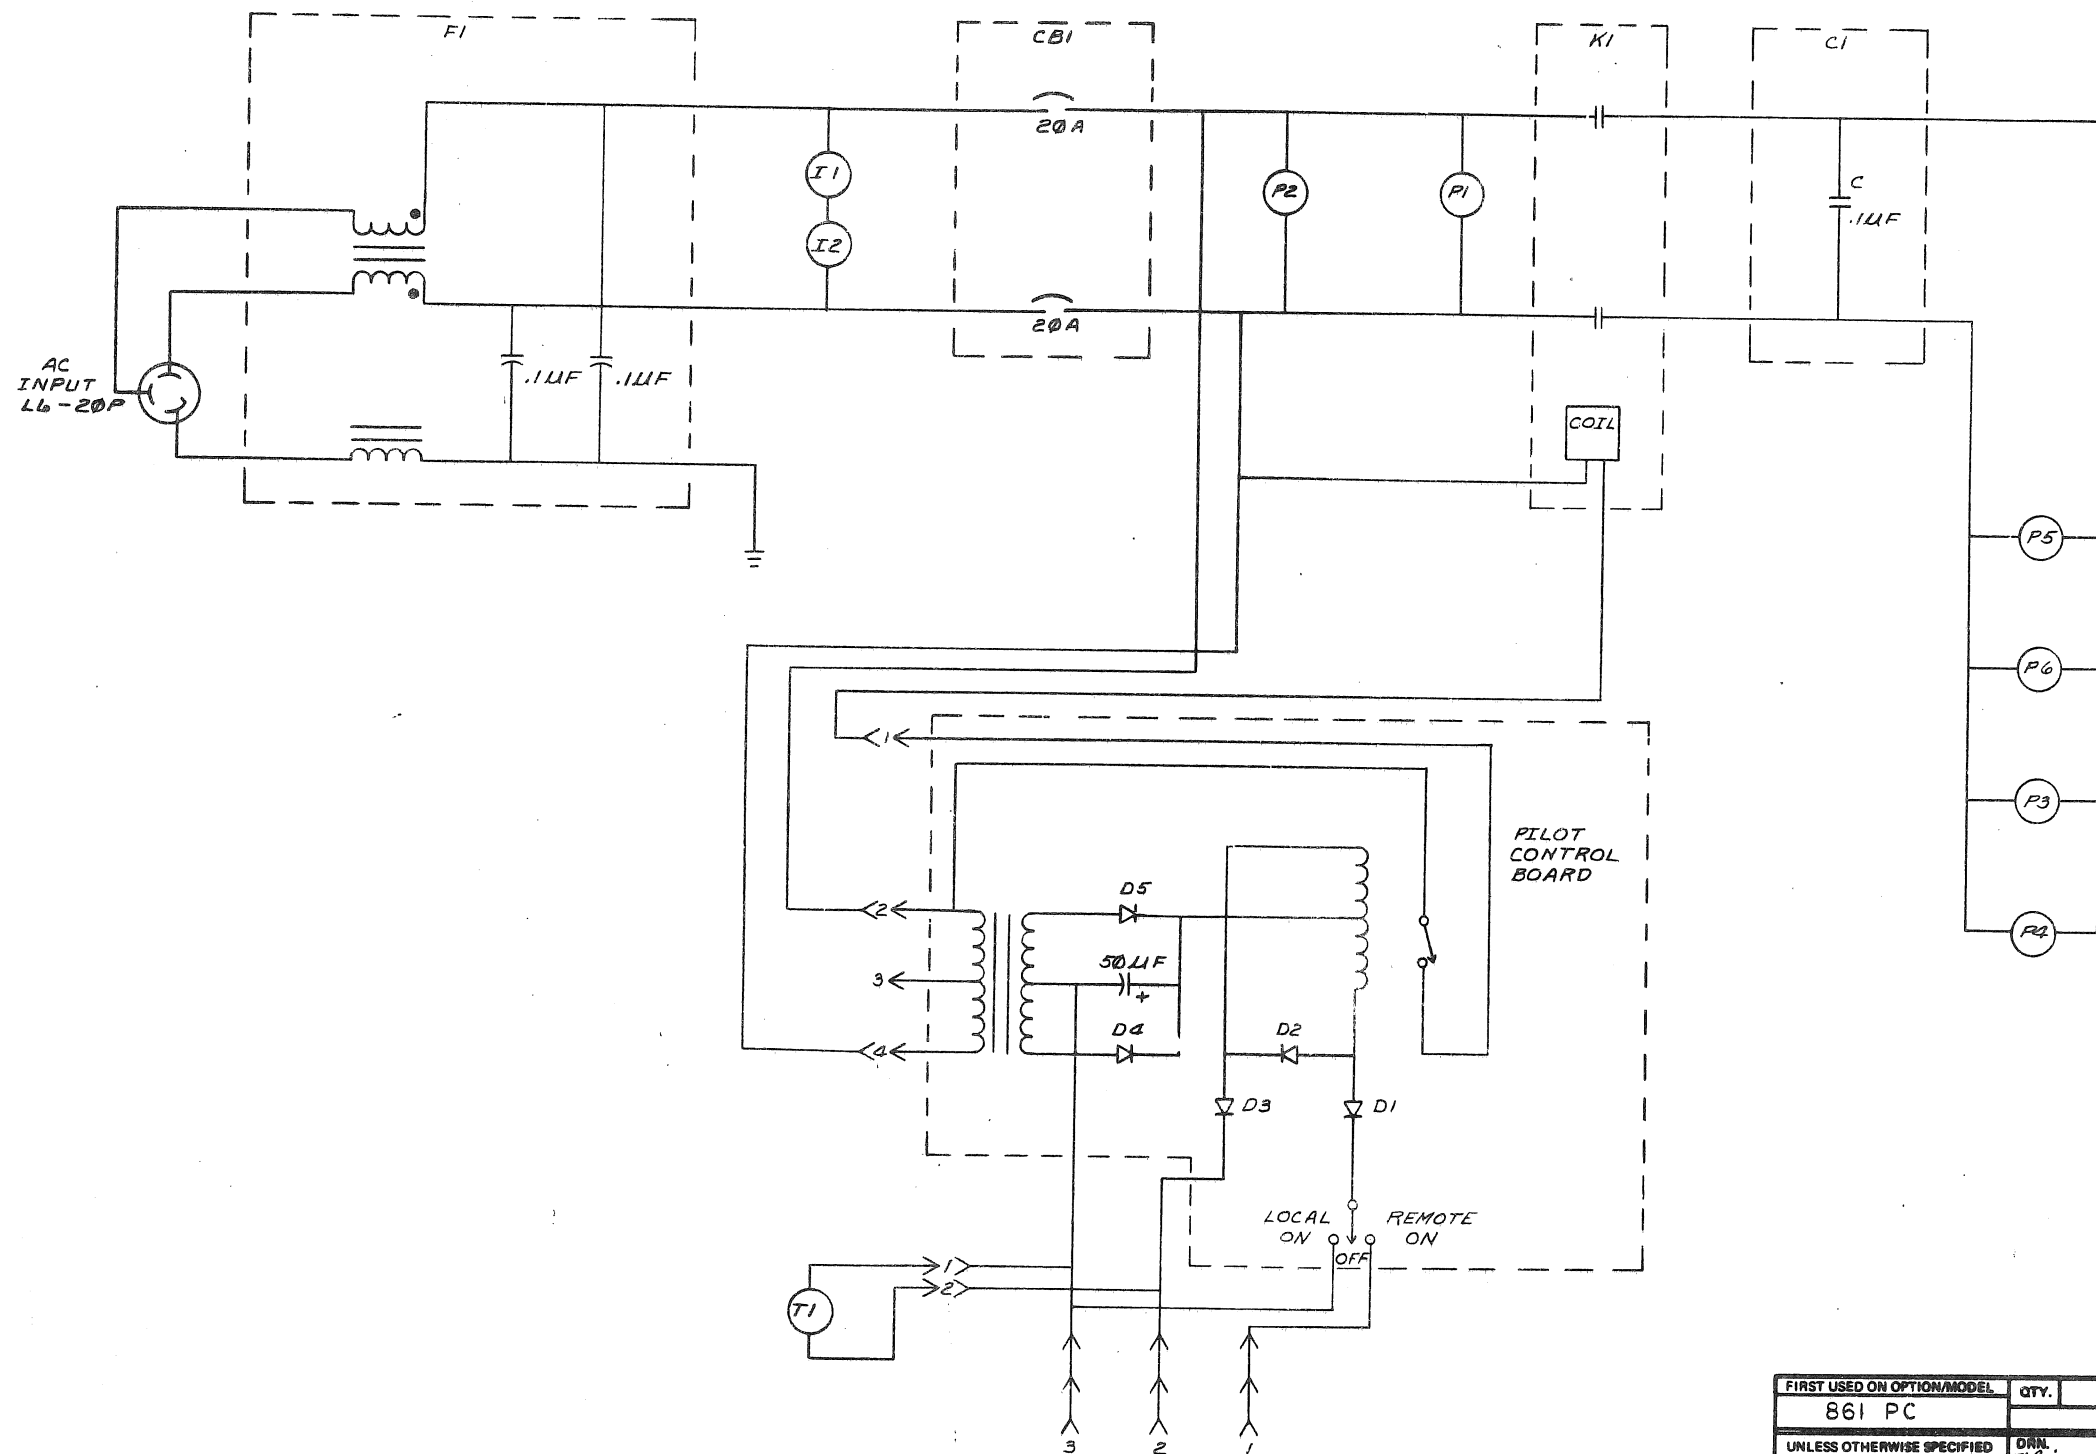

FIRST USED ON OPTION/MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
861 PC					
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES TOLERANCES		PARTS LIST			
DECIMALS	ANGLES	TITLE			
.XXX = .005	±0° 30'	CIRCUIT SCHEMATIC (861-B-PC.)			
.XX = .02		EQUIPMENT CORPORATION NATURAL MASSACHUSETTS			
.X = .1		REVISIONS			
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		NEXT HIGHER ASSY.			
MATERIAL		B-DD-861-0			
FINISH		SCALE			
		SHEET OF			
		DST.			

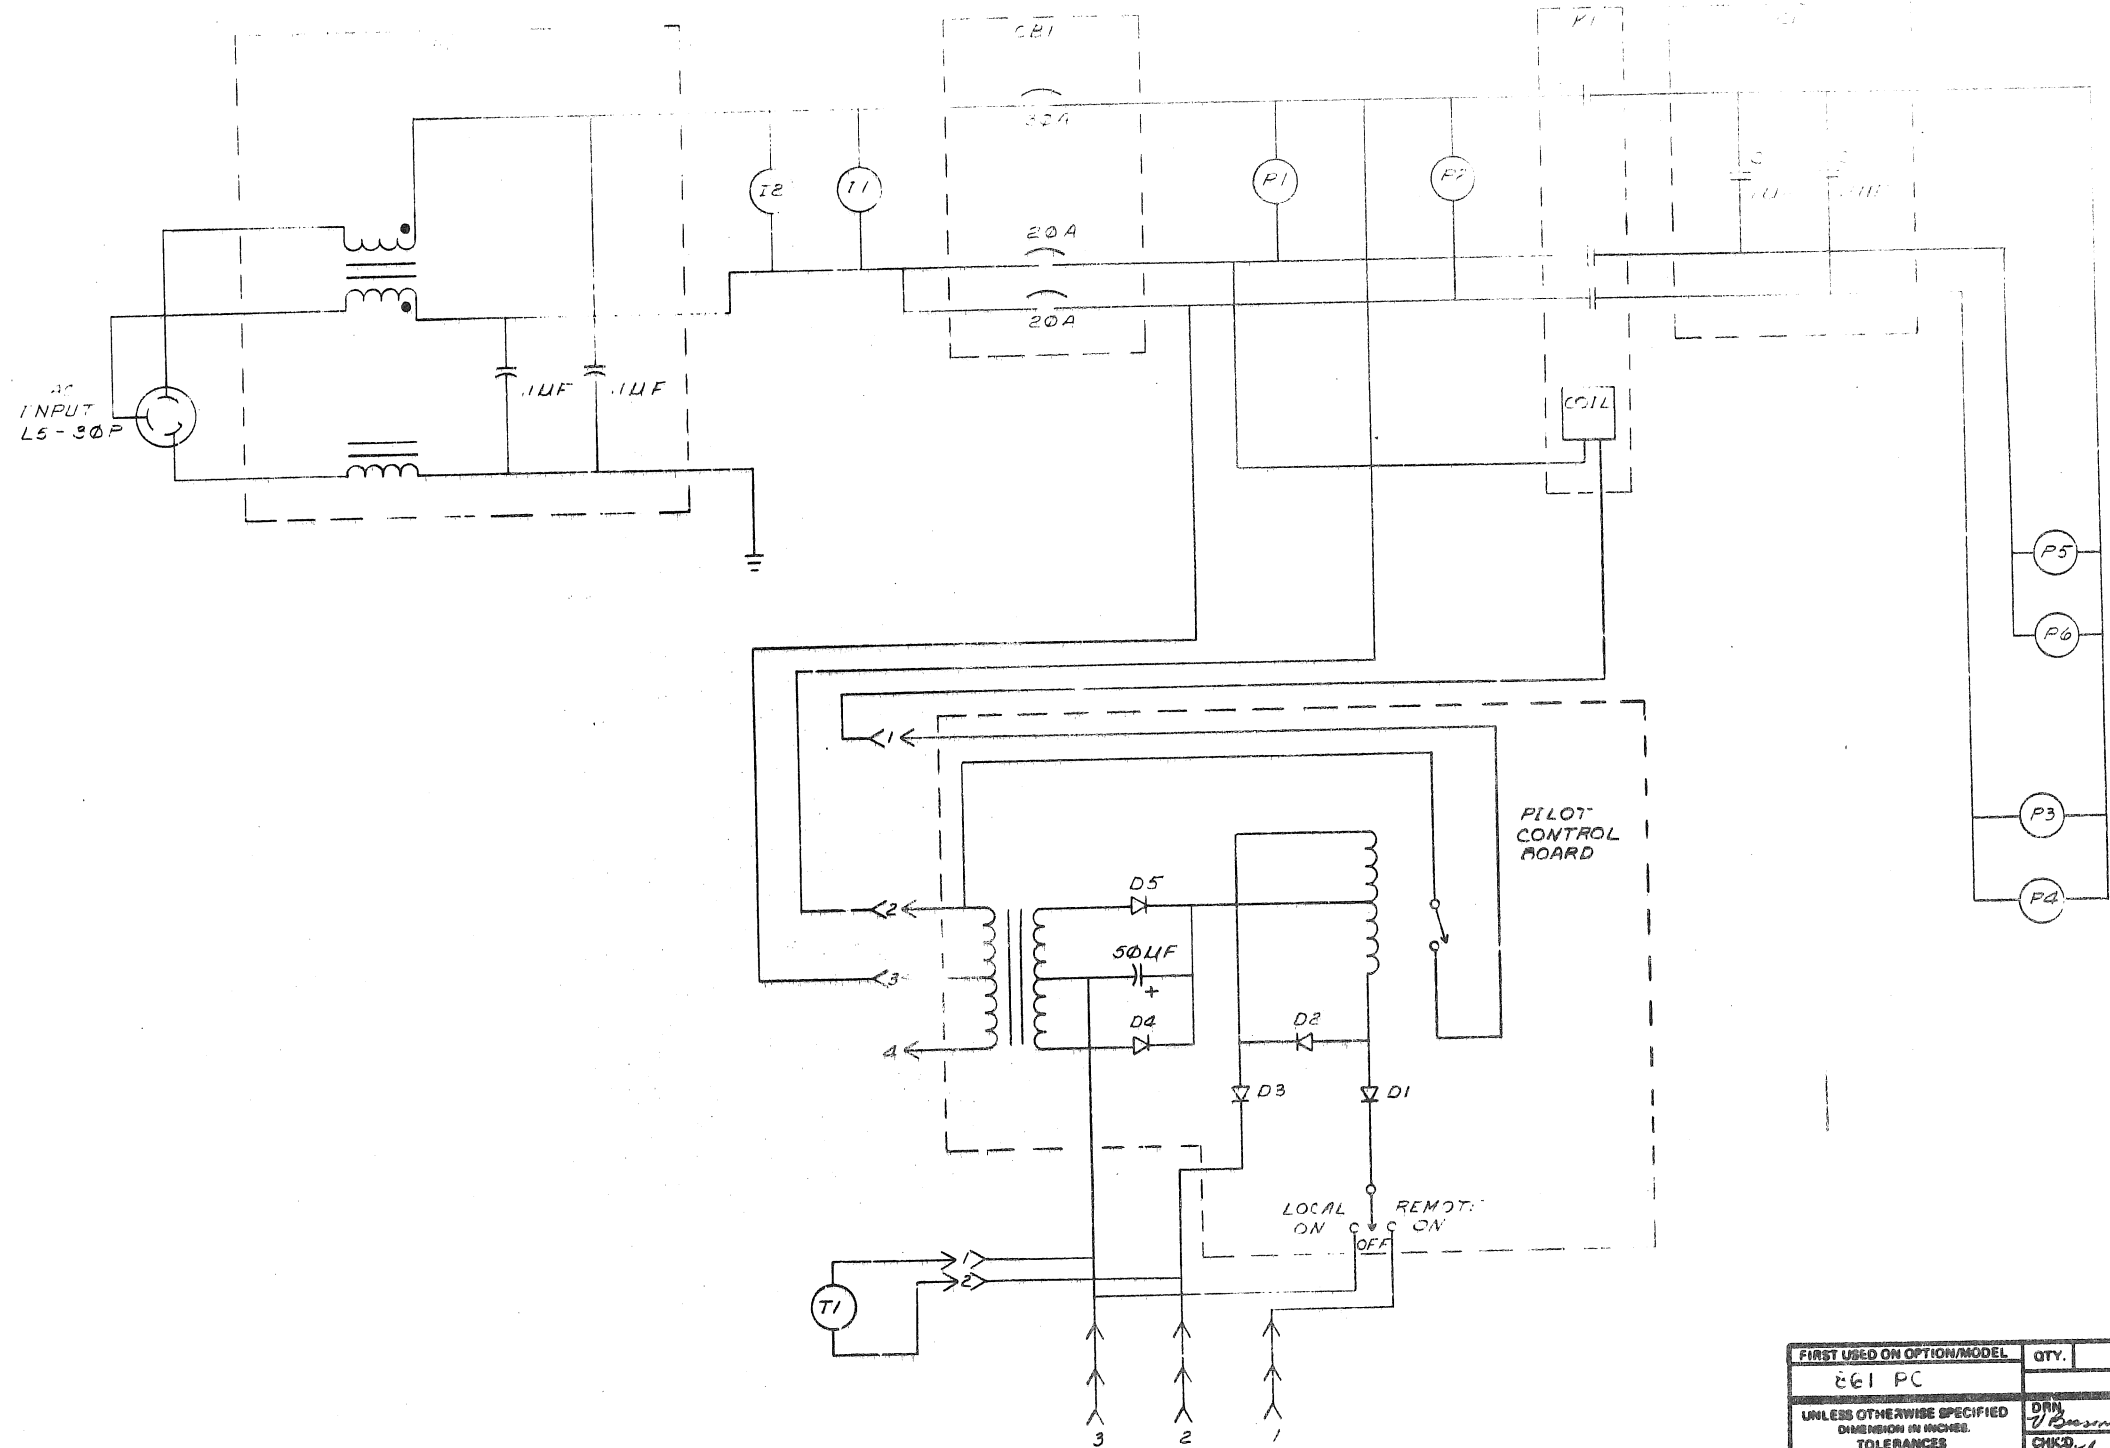

FIRST USED ON OPTION/MODEL		QTY.	DESCRIPTION	PART NO.	ITEM NO.
861 PC					
UNLESS OTHERWISE SPECIFIED DIMENSION IN INCHES.		DATE	PARTS LIST		
TOLERANCES		DATE	digital EQUIPMENT CORPORATION		
DECIMALS	ANGLES	DATE	TITLE		
XXX - .005	10° 30'	DATE	CIRCUIT		
XX - .002		DATE	SCHEMATIC		
X - .001		DATE	861-C P.C.		
REMOVE BURRS AND BREAK SHARP CORNERS SURFACE QUALITY		DATE	SIZE CODE		
MATERIAL		DATE	DCS 861-C-1		
FINISH		DATE	NUMBER		
		DATE	REV		
		DATE	DIST.		

BRUNING 40-107 15528
D/C FORM NO
DHD 100-A

