

"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1981 DIGITAL EQUIPMENT CORPORATION

FOR FIELD MAINTENANCE PRINT SET
REFER TO B-TC-RLV12-Ø-1

UNIT VARIATIONS


[illegible]

REVISIONS		USED ON OPTION/MODEL		DRN.	DATE	TITLE											
CHK	CHANGE NO.	RLV12-MR001	REV.	RLV12	<i>Jim Seard</i>	4-MAR-81	DRAWING DIRECTORY (RLV12)										
			B		CHK'D	DATE											
<i>M. Norman</i>					<i>BD</i>	<i>6/5/81</i>											
R. FITCH					PROJ. ENG.	DATE											
<i>Robert Fitch</i>					<i>Robert Fitch</i>	<i>4/5/81</i>											
					PROD.	DATE											
					<i>4/5/81</i>	<i>4/5/81</i>											
					SHEET 1	OF	3										

DRB 106A

MIR

"THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. 1981
COPYRIGHT © DIGITAL EQUIPMENT CORPORATION"

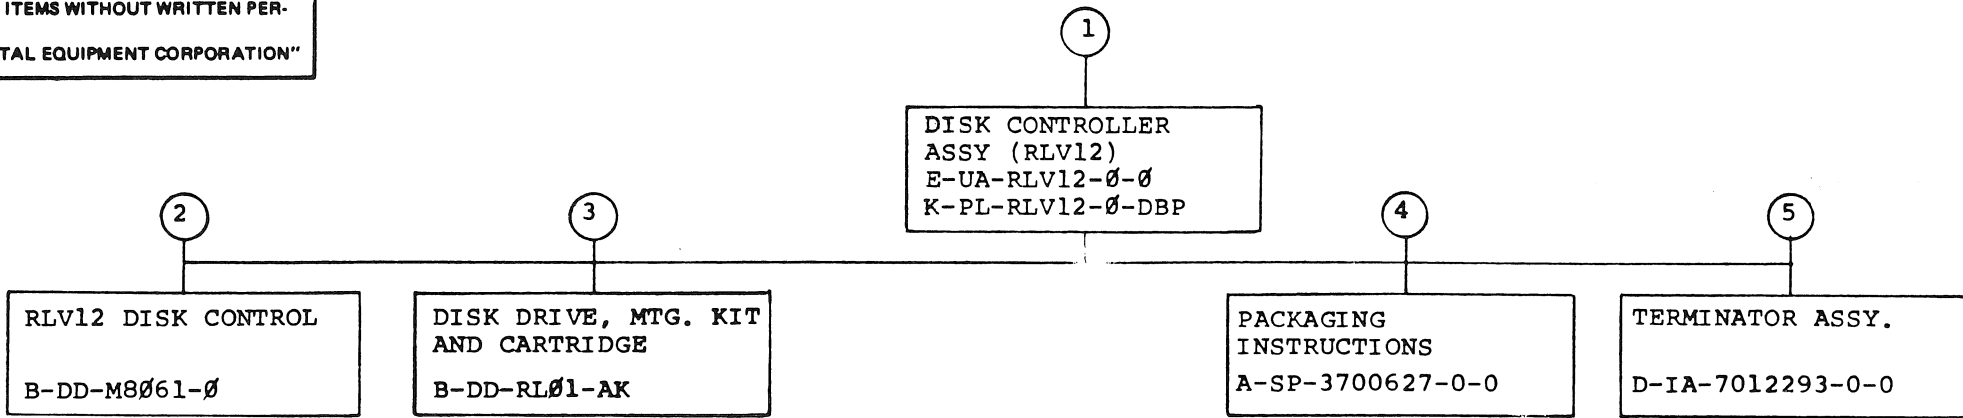

TITLE
DRAWING DIRECTORY (RLV12)

SHEET 2 OF 3


SIZE CODE
B DD

NUMBER
RLV12-0

REV
B

FIND NO.	DRAWING NO.	DESCRIPTION	TYPE	FIND NO.	DRAWING NO.	DESCRIPTION	TYPE
1	MPØ1282	RLV12 PRINT SET (MP)	-				
	B-TC-RLV12-Ø-1	RLV12 FIELD MAINTENANCE PRINT SET (TC)	-				
	E-UA-RLV12-Ø-Ø	DISK CONTROLLER ASSY, RLV12	E/M				
	K-PL-RLV12-Ø-DBP	DISK CONTROLLER ASSY, (RLV12) (PL)	-				
	A-SP-RLV12-Ø-8	RLV12 ENGINEERING SPECIFICATION	-				
	EK-RLV12-UG	RLV12 DISK CONTROLLER USERS GUIDE	-				
	A-PL-7012938-0-0	UNIT SELECT PLUG KIT	M				
	D-UA-BC8ØM-Ø-Ø	BC8ØM I/O CABLE	E/M				
	A-SP-1212691-01	SW,PB CAP "1/READY" FOR 1212690-00	E/M				
	A-SP-1212691-02	SW,PB CAP "2/READY" FOR 1212690-00	E/M				
	A-SP-1212691-03	SW,PB CAP "3/READY" FOR 1212690-00	E/M				
	B-PL-RLV12-Ø-SH	RLV12 SHIPPING LIST	E/M				
2	B-DD-M8Ø61-Ø	RLV12 DISK CONTROL	E/M				
3	B-DD-RLØ1-AK	DISK DRIVE, MTG. KIT AND CARTRIDE	E/M				
4	A-SP-3700627-0-0	PACKAGING INSTRUCTION	-				
	9906309-02	DIE CUT CARTON W/FOAM	-				
5	D-IA-7012293-0-0	TERMINATOR ASSY	M				
	A-DC-7416678-0-0	LOGO, TERMINATOR	M				
TYPE: E ELECTRICAL M MECHANICAL E/M ELECTRO/MECHANICAL				TITLE DRAWING DIRECTORY (RLV12)		SHEET 3 OF 3	SIZE CODE B DD
DRB 108A				NUMBER RLV12-Ø		REV B	

MR

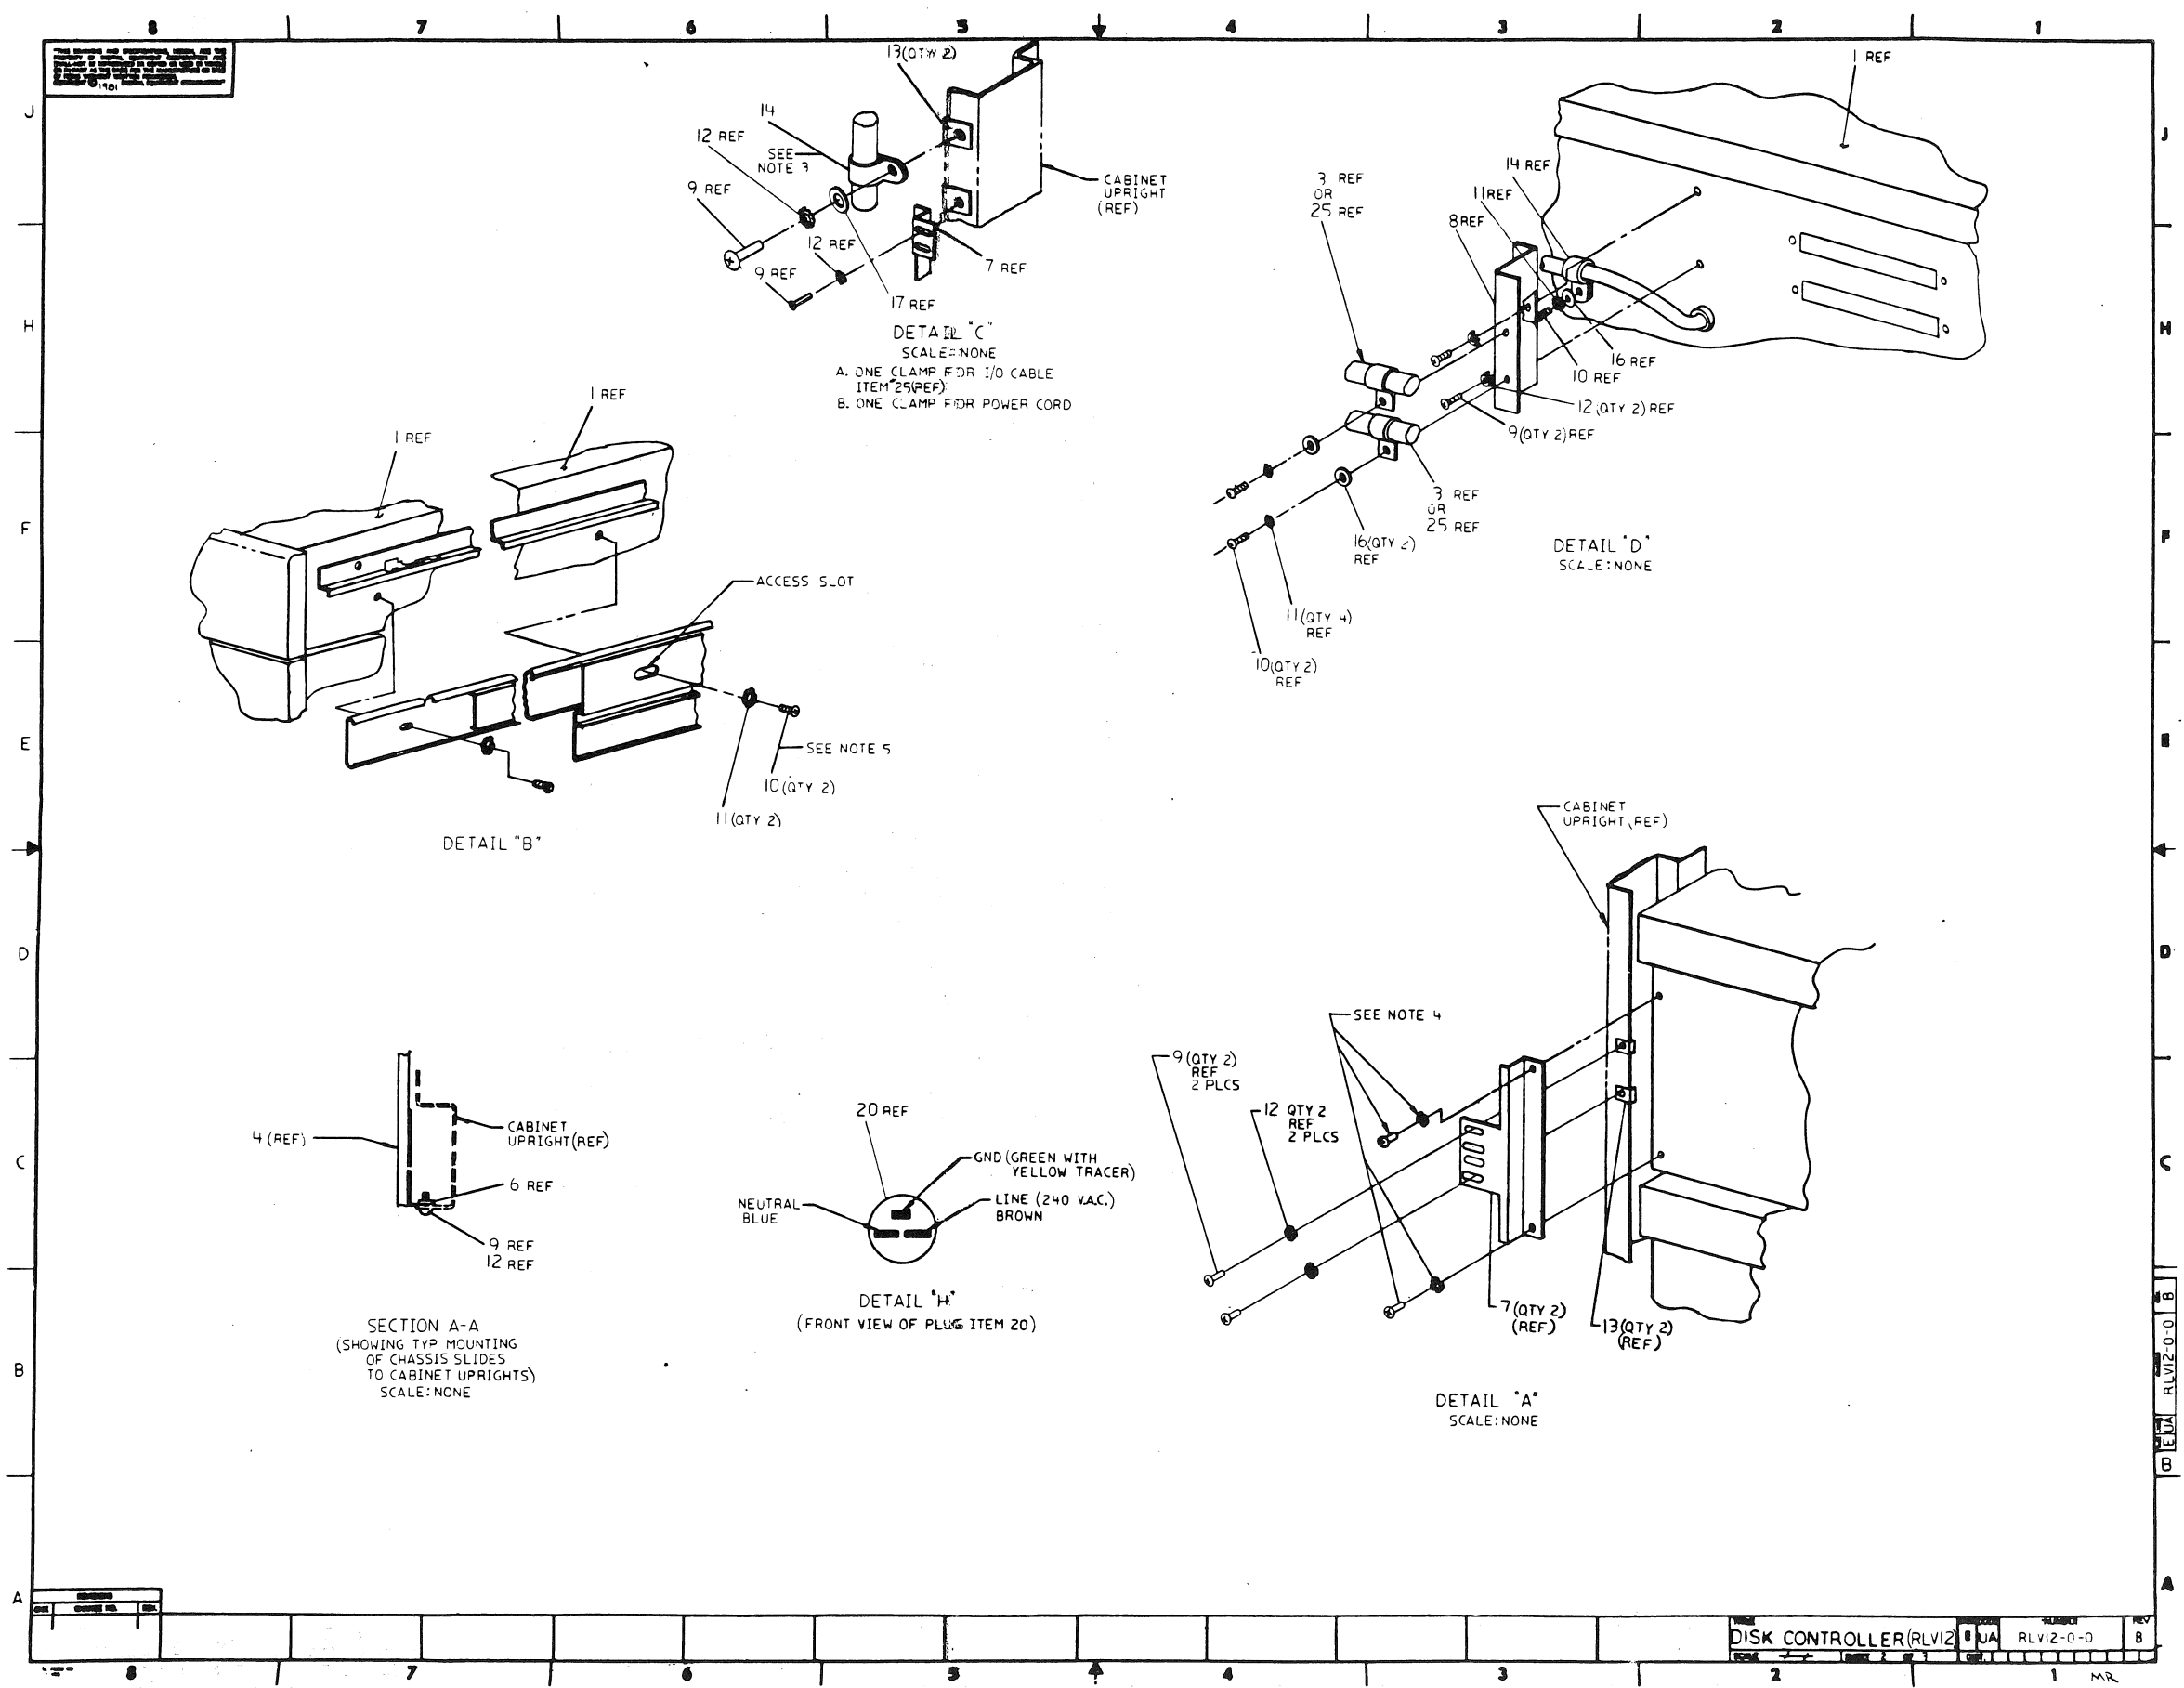

NOTES:

1. FOR SYSTEMS OPERATING AT 220 VAC REMOVE THE SCREWS FROM THE "VOLTAGE SELECTOR" COVER, WITHDRAW THE COVER AND RE-INSERT TURNED UPSIDE DOWN. AFTER INSERTION, "220V" MUST BE SHOWING THROUGH THE SMALL WINDOW. REPLACE THE TWO SCREWS; CUT OFF "110V" MALE PLUG AND REPLACE BY "220V" PLUG (ITEM 20). FOR COLOR CODE SEE DETAIL "H", SHEET 2. FOR 50HZ OPERATION ADD (ITEM 28) TO UNIT.
2. FOR SYSTEMS OPERATING WITH LOW LINE VOLTAGE, REMOVE TWO SCREWS FROM "VOLTAGE RANGE SELECTOR" COVER, WITHDRAW THE COVER AND RE-INSERT IT TURNED UPSIDE DOWN. AFTER THE INSERTION, "LOW" MUST BE SHOWING THROUGH THE SMALL WINDOW. REPLACE THE TWO SCREWS, SEE TABLE (FIRST SHEET, ZONE 6J).
3. CABLE CLAMP (ITEM 14) TO BE MOUNTED IN NEXT AVAILABLE HOLES (AS SHOWN IN DETAIL "C" SHT 2) ABOVE SHIPPING BRACKET (ITEM 7) AFTER SHIPPING BRACKET IS MOUNTED PER NOTE 4.
4. TO ATTACH SHIPPING BRACKET (ITEM 7) REMOVE TWO SCREWS AND TWO LOCKWASHERS FROM ONE SIDE OF THE POWER PANEL ON THE REAR OF DISK DRIVE (ITEM 1). POSITION A SHIPPING BRACKET TO DETERMINE LOCATION OF "U" NUTS (ITEM 13) AND ATTACH BRACKET USING ORIGINAL SCREWS AND LOCKWASHERS AND ITEMS 12 & 9 (AS SHOWN IN DETAIL "A"). REPEAT PROCEDURE ON OTHER SIDE OF DRIVE.
5. TO MOUNT RL01 TO CABINET:
 - A. MOUNT SLIDES AND BRACKETS TO UPRIGHTS.
 - B. EXTEND SLIDES AS FAR AS POSSIBLE BY RELEASING CATCHES, SEE DETAIL "B" (SHT 2).
 - C. PLACE DRIVE ON SLIDES AND PUSH BACK UNTIL ENDS OF RAILS FIT UNDER TABS ON SLIDES AND LATCHES ENGAGE.
 - D. SECURE DRIVE TO SLIDES USING SCREWS SUPPLIED. SEE DETAIL "B" (SHT 2).
TO REMOVE DRIVE, EXTEND SLIDES FULLY, REMOVE SCREWS RELEASE LATCHES AND LIFT OFF.
6. FOR LAST DRIVE IN A SYSTEM "CONTROLLER CABLE" (ITEM 3) PLUGS INTO EITHER SOCKET. TERMINATOR ASSY (ITEM 24) PLUGS INTO THE OTHER.
7. ITEM 22 THRU 27 ARE NOT ASSEMBLED UNTIL INSTALLATION IN A CABINET.

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND NOT TO BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR REPAIR OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1982 DIGITAL EQUIPMENT CORPORATION	REVISIONS		
	CHK	CHANGE NO.	REV

REVISIONS		
CHK	CHANGE NO.	REV

digital	QDR	DATE	ENG.	DATE	TITLE
	QDR'D	DATE	DATE	DATE	
DISC(RV12,125,4,22)		MAY-82		DISK CONTROLLER ASSY (RV12)	
FIRST USED ON OPTION MODEL: RV12		NEXT HIGHER ASSEMBLY:		SIZE CODE	NUMBER
		B-DD-RV12-0		E UA	RV12-0-0
					REV. B

LINE	ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QUANTITY PER VARIATION
					00
1	1	E-UA-RL01-AK-0	ORL01-AK	RL01-A + RL01K-DC,115/230V	REF
2	2	F-UA-RL01K-DC-0	RL01K-DC	RL01 DATA PACK	REF
3	3		RC21Z-XX	SHIELDED I/O CABLE,RL01/RL02,PAS	REF
4	4	SEE NOTE 1	1213686-00	CHASSIS SLIDE SET INCLUDED 1 L.H	REF
5	5	A-MD-7419261-0-0	7419261-00	BRACKET CHASSIS SLIDE	REF
6	5	C-MD-7419262-0-0	7419262-00	PAR NUT	REF
7	7	C-MD-7419856-0-0	7419856-00	BRKT, RL01 SHIPPING	REF
8	8	C-IA-7419857-0-0	7419857-00	BRKT. CABLE SUPPORT	REF
9	9		9006073-01	SCREW,PAN,PHIL 10-32X 1/2 SS	REF
10	10		9005021-01	SCREW,PAN,PHIL 6-32X 5/16 SS	REF
11	11		9007649-00	WASHER, LOCK, EXTERNAL TOOTH #5	REF
12	12		9007651-00	WASHER, LOCK, EXTERNAL TOOTH #10	REF
13	13		9007786-00	RETAINER, U-NUT, 10-32	REF
14	14		9007085-00	CLAMP,CABLE,SCREW MTD. 1/2 "	1
15	15	A-SP-3700627-0-0	3700627-01	PKG OPTION RLV12	1
16	16		9006653-00	WASHER, FLAT, .375 D.D. X .156 I	REF
17	17		9006668-00	WASHER,FLAT 5/8 ODX 13/64IDX.032	REF
18	18		9007031-00	TIE,CABLE BUNDL.DIA 0- 3/4"=101	REF
19	19		9006039-04	SCREW,BIND,SLUT 8-32X 1/2 SS	REF
20	20		9008953-00	CONN,POWER 02P03W PLUG NEMA 06-1	REF
21	21	A-PL-H9504-2-0	H9504-00	REAR DOOR, HIBOY FULLY SLOTTED S	REF
22	22		9006563-00	NUT,KEP 8-32X 11/13AF	1
23	23	A-PL-7012938-0-0	7012938-00	*** THIS ITEM IS NOT USED ***	-
24	24	D-IA-7012293-0-0	7012293-00	TERMINATOR ASSEMBLY	1
25	25	D-UA-8C804-0-0	8C804-06	RLV12 TO FIRST DRIVE,6FT	1
26	26	D-UA-M8061-0-0	M8061-00	RL01/RL02 DISK CONTROL,22-BIT AD	1
27	27		9010174-01	SCREW,PAN,PHIL,SEMS 8-32X .31 L	1
28	28	SEE NOTE 2	3617674-00	LABEL,SERIAL & POWER,UNIVERSAL	REF
29	29		PKRLV12-00	RLV12 DISK CONTROLLER USERS GUID	1
30	30		ORL02-FA	*** THIS ITEM IS NOT USED ***	-

REVISION HISTORY			BASIC PART NO: RLV12		DRN: JIM SICARD		DATE: 24-FEB-81		DIGITALL	
ENG	ECO NUMBER	REV	SECTION A OF A	CHK'D: BILL HOVEY	DATE: 3-SEP-81	TITLE PARTS LIST				
REF	INITIAL	IA	SECTION. VARIATION INDEX	DES.ENG.: ROBERT FITCH	DATE: 14-SEP-81	DISK CONTROLLER ASSY (RLV12)				
	RLV12-MK001	IB	[A] 00	RESP.ENG.: ROBERT FITCH	DATE: 14-SEP-81	DOCUMENT NUMBER				
			[B]	MFG.ENG.: J. LONGO	DATE: 14-SEP-81	SIZE	CODE	NUMBER	REV	
			[C]	ASSEMBLY NUMBER:	TOP DOCUMENT NUMBER:	K	PL	RLV12-0-DBP	8	
			[D]	E-UA-RLV12-0-0	#B-DD-RLV12-0	FILE NAME:		EDIT #		
			[E]			Z3133B.PLS		21		
"THIS DRAWING AND SPECIFICATIONS HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT (C) 1982. DIGITAL EQUIPMENT CORPORATION"										


MR

LINE	ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QUANTITY PER VARIATION
					00
31	31		1212691-01	LENS,ENCODER SW"1/READY"	1
32	32		1212691-02	LENS,ENCODER SW"2/READY"	1
33	33		1212691-03	LENS,ENCODER SW"3/READY"	1
34	34		EKRLV12-CG	RLV12 DISK CONTROLLER CONF. SHEE	1

35 NOTE: 1 ITEMS #2 THRU #14 & #16 THRU #21 AND #28 ARE SUPPLIED WITH DRIVE
 36 NOTE: - AND LISTED ON E-UA-PL02-AK-0.
 37 NOTE: 2 REFER TO NOTE #1 ON SHEET 3 OF UA FOR INSTRUCTIONS.

D	I	G	I	T	A	L	TITLE	DISK CONTROLLER ASSY (RLV12)	SECTION A OF A	SIZE	CODE	DOCUMENT NUMBER	REV
										K	PL	RLV12-0-D8P	B

MR

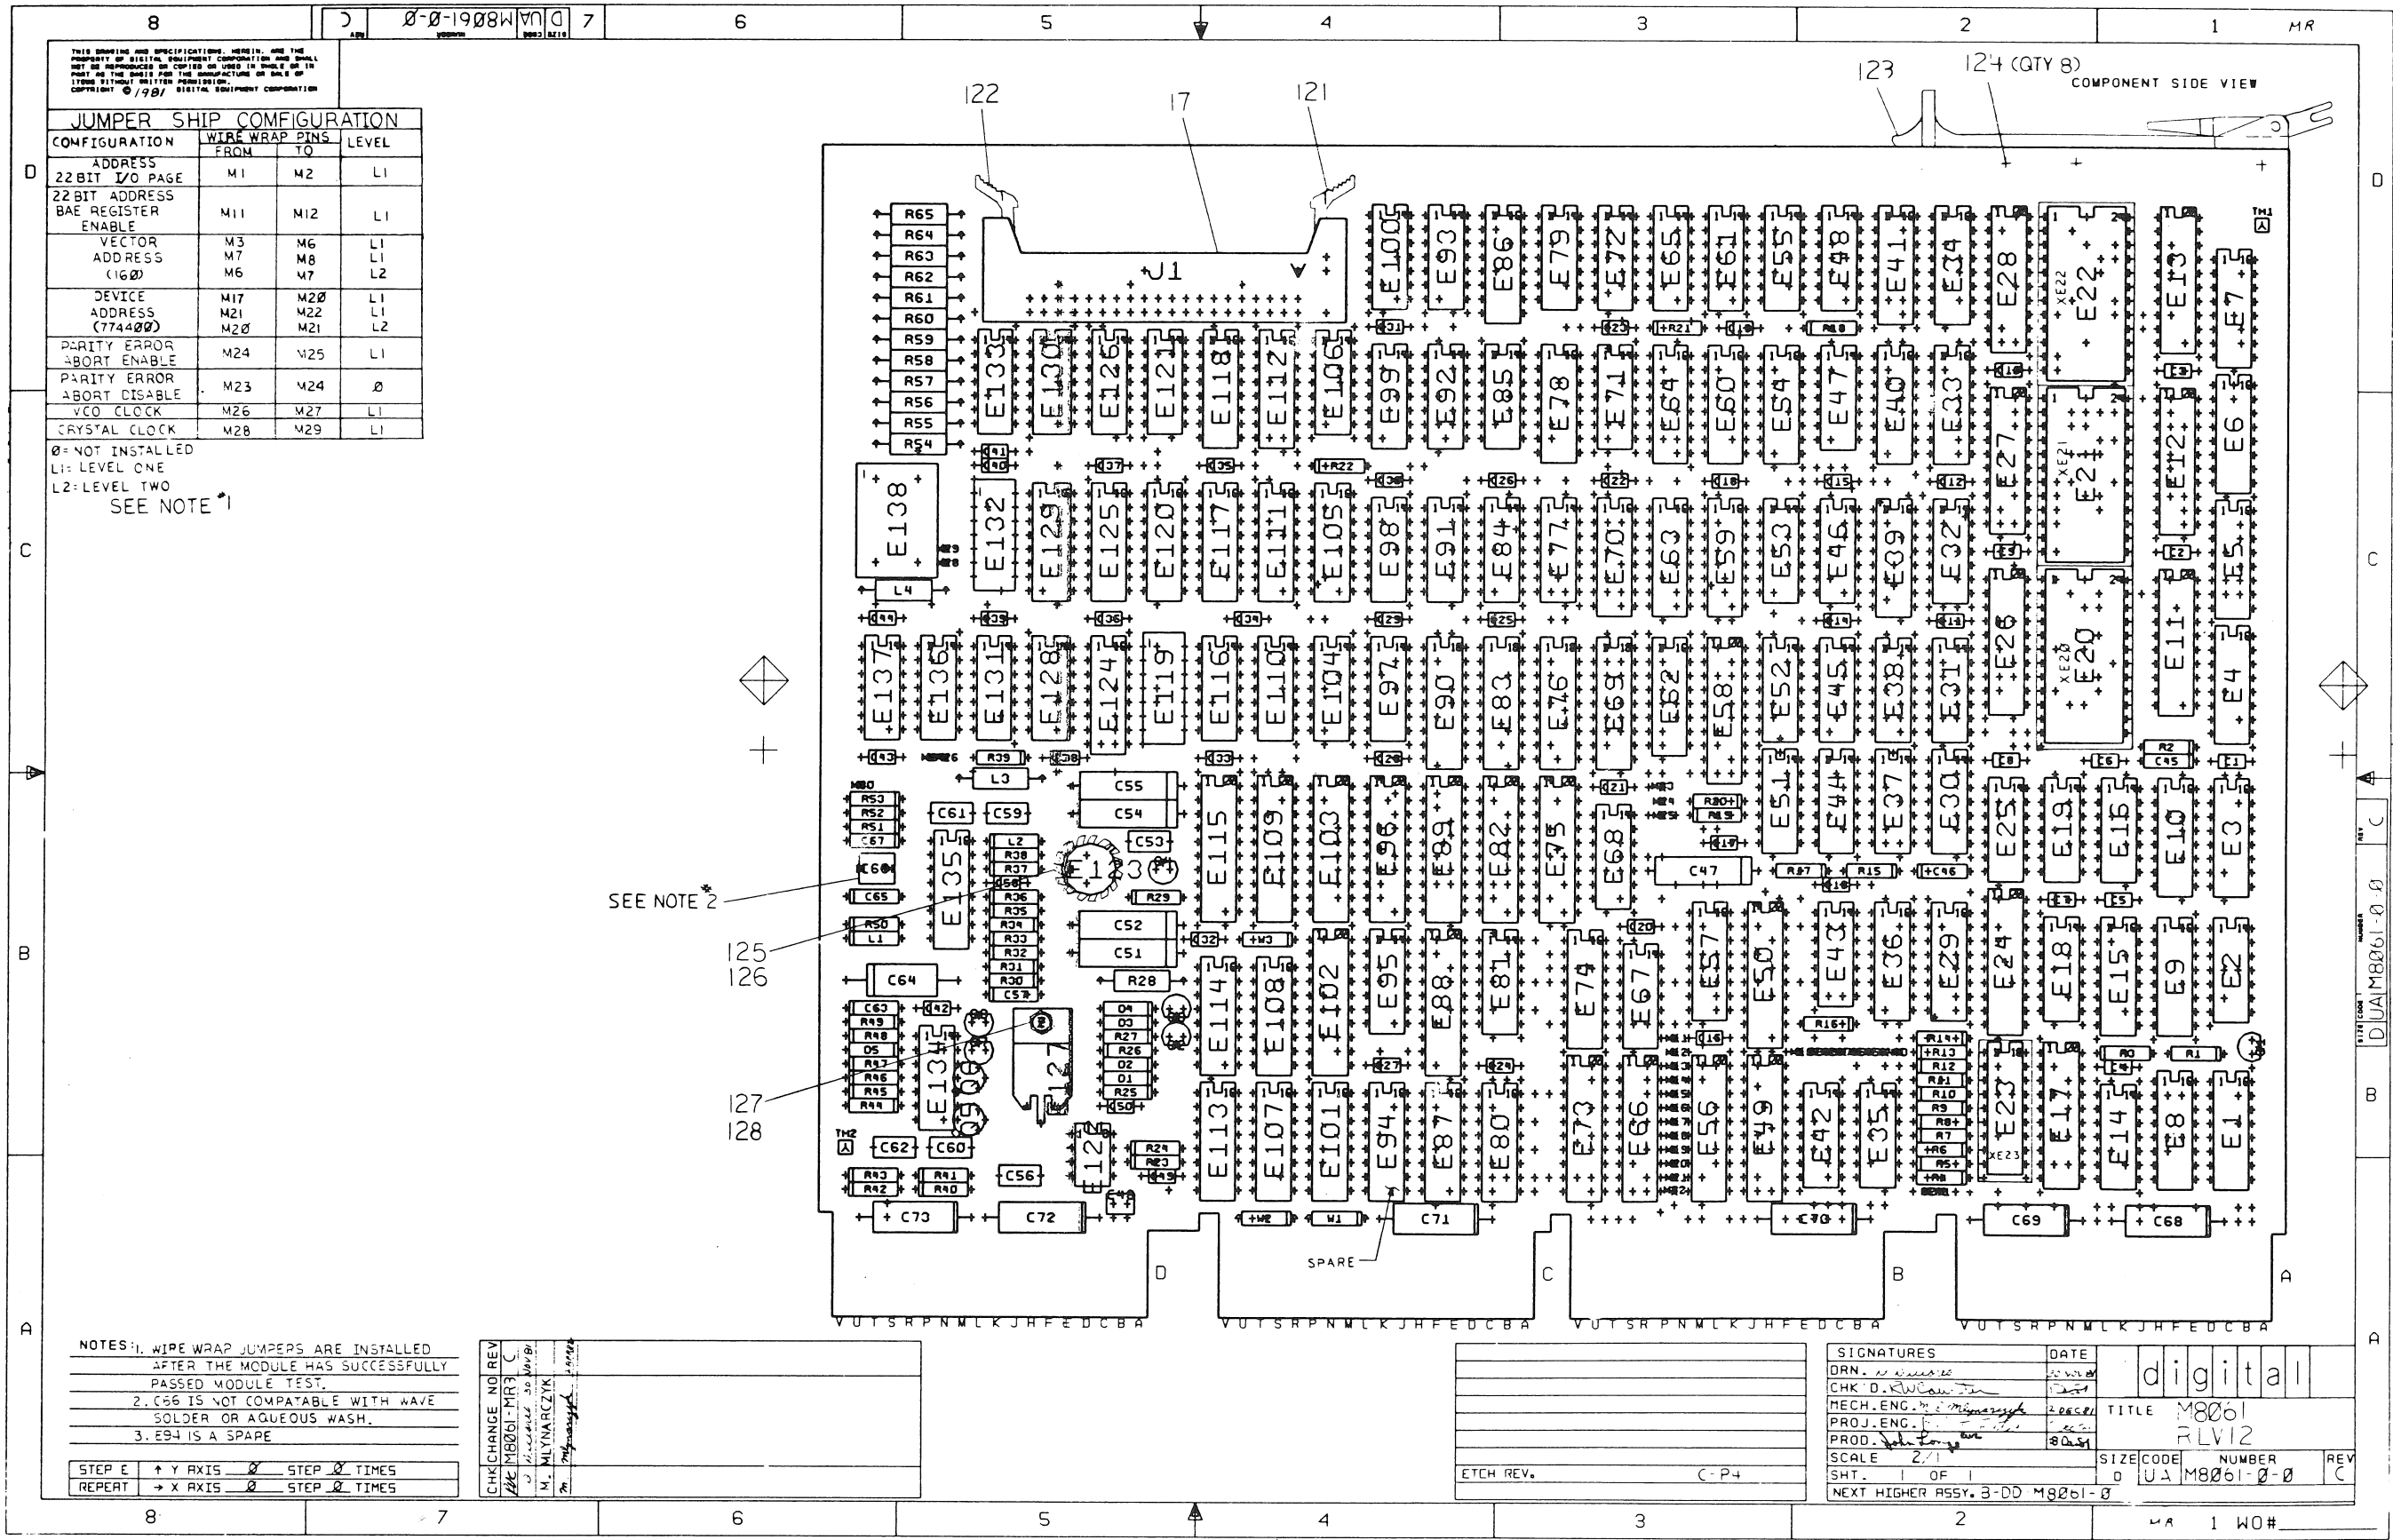

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.
COPYRIGHT © 1981 DIGITAL EQUIPMENT CORPORATION

CONFIGURATION	WIRE WRAP PINS FROM	WIRE WRAP PINS TO	LEVEL
ADDRESS 22 BIT I/O PAGE	M1	M2	L1
22 BIT ADDRESS BAE REGISTER ENABLE	M11	M12	L1
VECTOR ADDRESS (160)	M3	M6	L1
	M7	M8	L1
	M6	M7	L2
DEVICE ADDRESS (774400)	M17	M20	L1
	M21	M22	L1
	M20	M21	L2
PARITY ERROR ABORT ENABLE	M24	M25	L1
PARITY ERROR ABORT DISABLE	M23	M24	0
VCO CLOCK	M26	M27	L1
CRYSTAL CLOCK	M28	M29	L1

0 = NOT INSTALLED
L1 = LEVEL ONE
L2 = LEVEL TWO
SEE NOTE *1

NOTES: 1. WIRE WRAP JUMPERS ARE INSTALLED AFTER THE MODULE HAS SUCCESSFULLY PASSED MODULE TEST.
2. C66 IS NOT COMPATABLE WITH WAVE SOLDER OR AQUEOUS WASH.
3. E94 IS A SPARE

STEP E	→ Y AXIS	0	STEP 0 TIMES
REPEAT	→ X AXIS	0	STEP 0 TIMES

CHK CHANGE NO	REV
444	M8061-MR3 C
2.0 10/20/81 30.0000	
M. MLYNARCZYK	
M. MLYNARCZYK	

SIGNATURES		DATE
DRN. 10/20/81		10/20/81
CHK'D. R. W. C.		10/20/81
MECH. ENG. M. MLYNARCZYK		10/20/81
PROJ. ENG. M. MLYNARCZYK		10/20/81
PROD. M. MLYNARCZYK		10/20/81
SCALE 2/1	TITLE M8061	REV C
SHT. 1 OF 1	SIZE CODE D	NUMBER U1 M8061-0-0
NEXT HIGHER ASSY. 3-DD M8061-0		

ETCH REV. C-P4

LINE	ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QTY PER VARIATION	REFERENCE DESIGNATOR
					00	
1	1	D-MD-5014398-0-0	5014398-00	DRILL AND FITCH 80.	1	
2	2		1012784-00	.047 MFD 50V +80-20% CER	47	C1-C44,C49,C50,C58
3	3		1013466-09	1000.0 MMF 50V 10% X7R CER	1	C45
4	4		1013466-07	270.0 MMF 50V 5% CER	2	C46,C57
5	5		1005306-00	6.8MFD 35V 10% S.TANT	5	C47,C51,C52,C54,C55
6	6		1011740-00	5600.0 MMF 50V 10% CER	1	C48
7	7		1010279-01	.47 MFD 25V 20% CER	6	C53,C56,C59-C62
8	8		1013466-08	680.0 MMF 50V 10% X7R CER	2	C57,C53
9	9		1010646-00	.015 MFD 50V 2% M.POLYCARB	1	C64
10	10		1013466-02	18.0 MMF 50V 5% CER	1	C55
11	11		1016628-00	7.0 MMF TO 30.0 MMF TRIMMER	1	C55
12	12		1017472-00	10 MFD 35V +50-10% AL EL	5	C68,C70-C73
13	13		1018237-00	.0047 MFD 100V 1% POLYPROP	1	C59
14	14		1109991-00	1N 754A VZ= 6.8 5% .40W	2	D1,D2
15	15		1105275-00	D 672 TR= 15NS PIV= 60V SI	2	D3,D4
16	16		1111577-00	1N 4454 TR= 4NS PIV= 50 S	1	D5
17	17		1209941-02	PCB,HEADER 40PIN(2X20).100CC 90D	1	J1
18	18		1301475-00	1.10 K .25 W 5.0 % CC	1	R1
19	19		1304839-00	51.0 K .25 W 5.0 % CC	1	R2
20	20		1300365-00	1.0 K .25 W 5.0 % CC	8	R3,R14,R16,R19,R21,R22,R29,R39
21	21		1300295-00	330.0 .25 W 5.0 % CC	4	R4,R5,R9,R11
22	22		1301424-00	680.0 .25 W 5.0 % CC	4	R5,R7,R8,R10
23	23		1305114-00	3.48 K .25 W 1.0 % RN55D-F10	1	R12
24	24		1302873-00	261.0 .25 W 1.0 % RN55D-F10	1	R13
25	25		1304856-00	4.64 K .25 W 1.0 % RN55D-F10	1	R15
26	26		1302397-00	180.0 K .25 W 5.0 % CC	1	R17
27	27		1300229-00	100.0 .25 W 5.0 % CC	5	R18,R20,R35,R36,R43
28	28		1312930-00	5.10 K .25 W 5.0 % CC	1	R23
29	29		1300417-00	2.20 K .25 W 5.0 % CC	1	R24
30	30		1300247-00	120.0 .25 W 5.0 % CC	1	R25

REVISION HISTORY			BASIC PART NO: M8061			DRN: R.W.CAUNTER			DATE: 29-JCT-80			D I T S I T A I L		
ENG	ECO NUMBER	REV	SECTION A OF A			CHK'D: R.W.CAUNTER			DATE: 29-JAN-81			TITLE PARTS LIST		
---	INITIAL	IA	SECTION VARIATION INDEX			DES.ENG: M.MLYNARCZYK			DATE: 29-JAN-81			M8061 RLV12		
MM	M8061-MR001	IB	[A] 00											
RF	M8061-MR002	IC	[B]											
MM	M8061-MR003	ID	[C]											
			[D]											
			[E]											
			[F]			RESP.ENG.: R.FITCH			DATE: 29-JAN-81			DOCUMENT NUMBER		
			[G]											
			[H]											
			[I]											
			[J]			MFG.ENG.: J.LONCO			DATE: 18-FEB-81			K PL M8061-0-DBP		
			[K]											
			[L]											
			[M]			ASSEMBLY NUMBER:			TOP DOCUMENT NUMBER:			FILE NAME:		
			[N]			ID-U-M8061-0-0			M8-DD-M8061-0			Z1949D.PLS		
"THIS DRAWING AND SPECIFICATIONS HEREIN, ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT (C) 1982. DIGITAL EQUIPMENT CORPORATION"														


LINE	ITEM	DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QTY PER VARIATION 00	REFERENCE DESIGNATOR
79	79		1914888-00	74S09N AND-GATE-QUAD 2INPUT	1	E35
80	80		1912849-00	LS161 COUNTER,SYNCHR,4BIT	2	E35,E125
81	81		1912816-00	LS32 OR GATE-QUAD 2IN,POS	1	E37
82	82		1912805-00	LS08 AND GATE-QUAD 2IN,PO	2	E38,E67
83	83		1910548-00	74S157 MUX 1 OF 2 (QUAD)	1	E41
84	84		1915932-00	LS125 BUFFER,QUAD BUS	1	E43
85	85		1913340-00	74S32 OR GATE-QUAD 2IN	1	E44
86	86		1912388-00	74S02 NOR GATE-QUAD 2IN,PO	3	E45,E92,E137
87	87		1912813-00	LS27 NOR GATE-TRIPLE 3IN	2	E46,E91
88	88		1910532-00	74S00 NAND GATE-QUAD 2IN	2	E47,E97
89	89		1913040-00	DC 005 TRANSCEIVER 4BIT	4	E49,E56,E66,E73
90	90		1915193-00	LS244 DRIVER,LINE,DCTAL,T	2	E50,E89
91	91		1912807-00	LS10 NAND GATE-TRIPLE 3IN	1	E52
92	92		1910534-00	74S04 INVERTER GATE-HEX 1I	4	E53,E61,E81,E77
93	93		1912697-00	LS174 FF-D HEX w/CLEAR	7	E54,E57,E59,E60,E63,E78,E117
94	94		1910544-00	74S74 FF-D DUAL,EDGE TRIGG	6	E55,E35,E104,E128,E131,E136
95	95		1914035-00	DC 006 RIPOLAR,BUS ADDRESS	3	E58,E88,E102
96	96		1912844-00	LS151 MUX 1 OF 8 & DATA	3	E64,E70,E129
97	97		2114212-00	P 2114-2 RAY,1024X4,STATIC	4	E69,E76,E83,E90
98	98		1912847-00	LS157 MUX 1 OF 2(QUAD)	1	E74
99	99		1912868-00	LS299 SHIFT REG. 8-BIT UNI	2	E75,E82
100	100		1912951-00	DM 8556 COUNTER,9INARY,4BIT	5	E80,E87,E101,E108,E114
101	101		1910547-00	74S153 MUX 1 OF 4 (DUAL)	1	E85
102	102		1914214-00	LS374 FF-D DCTAL EDGE TRIG	4	E96,E103,E109,E115
103	103		1913474-00	9401 GENERATOR/CHECKER CR	1	E98
104	104		1912096-00	DEC 74S86 XOR GATE,QUAD 2IN	1	E99
105	105		1911712-00	74S51 AND-OR GATE-INVERT D	1	E100
106	106		1910956-00	74S151 MUX 1 OF 8	1	E105
107	107		1913839-00	LS165 SHIFT REG.,8BIT	2	E107,E113
108	108		1912389-00	74S08 AND GATE-QUAD 2IN,PO	1	E110
109	109		1911341-00	75113 DRIVER,LINE,DUAL,4A	3	E111,E112,E118
110	110		1910542-00	74S64 A-O-I GATE 4-2-3-2	1	E115
111	111		23219A1-00	A1-07	1	E120
112	112		1911944-00	555CN TIMER,FUNCT.BLOCK	1	E122
113	113		1912541-00	79M05 VOLT REG,FIX -5V	1	E123
114	114		1910545-00	74S112 FF-JK DUAL,EDGE TRIG	1	E124
115	115		1910268-00	DEC 751078 RECEIVER,LINE,DUAL,	3	E126,E130,E133
116	116		1912536-01	7805 VOLT REG,FIX +5V	1	E127
117	117		1913017-00	3046 XSISTOR ARRAY,3 ISJL	1	E134
118	118		1911911-00	DEC 74S124 OSCILLATOR,DUAL VOLT	1	E135
119	119		9009149-01	PIN,STAKING 0.235 HX0.345LG SQUA	30	M1-M30
120	120		9009185-00	JUMPER, WIRE, INSULATED, BLACK B	3	M1-M3
121	121		1209941-03	PCR,HEADER LATCH	1	
122	122		1209941-04	PCR,HEADER LATCH	1	
123	123		1213113-01	HANDLE,MODULE,	1	
124	124		9000024-01	FYELFT,ROLLED 0.1210DX0.192	3	
125	125		9007201-00	TRANSIPADS #10253	1	
126	126		1210001-00	HEAT SINKS,T0-5 .500DX0.25	1	


D	I	G	I	T	A	I	L	TITLE	SECTION A OF A	SIZE	CODE	DOCUMENT NUMBER	REV
								M8061				M8061-O-D8P	D
								RLV12					


LINE ITEM		DOCUMENT NUMBER	PART NUMBER	DESCRIPTION	QTY PER VARIATION 00	REFERENCE DESIGNATOR
127	127		9006010-01	SCREW,PAN,PHIL 4-40X 5/16 SS	1	
128	128		9009990-00	NUT,KEP , 4-40 X1/4 AF	1	
129	129		23963A9-00	A9-01	1	E7
130	130		23134F3-00	F3-03	1	E22
131	131		23172F3-00	F3-03	1	E21
132	132		23136F3-00	F3-03	1	E20
133	133		23587A2-00	A2-05	1	E62
134	134		1215006-06	SKT,IC 24PIN DIP TIN PLATE	3	XE20-XE22
135	135		9105740-55	WIRE(WRAP)30AWG UL1423	A/R	
136	136		1215006-04	SKT,IC 20PIN DIP TIN PLATE	1	XE23
137	137		1618238-02	BEAD,FERRITE .138ODX.330LG	2	L3,L4
138	138		9107254-00	*** THIS ITEM IS NOT USED ***	-	


139 NOTE: 1. 1916680-01(2911-A) IS AN ALTERNATE PART FOR 1916680-00(2911).

D	I	G	I	T	A	L	TITLE	SECTION A OF A	SIZE	CODE	DOCUMENT NUMBER	REV
							M8061 RLV12		K	PL	M8061-0-DBP	D

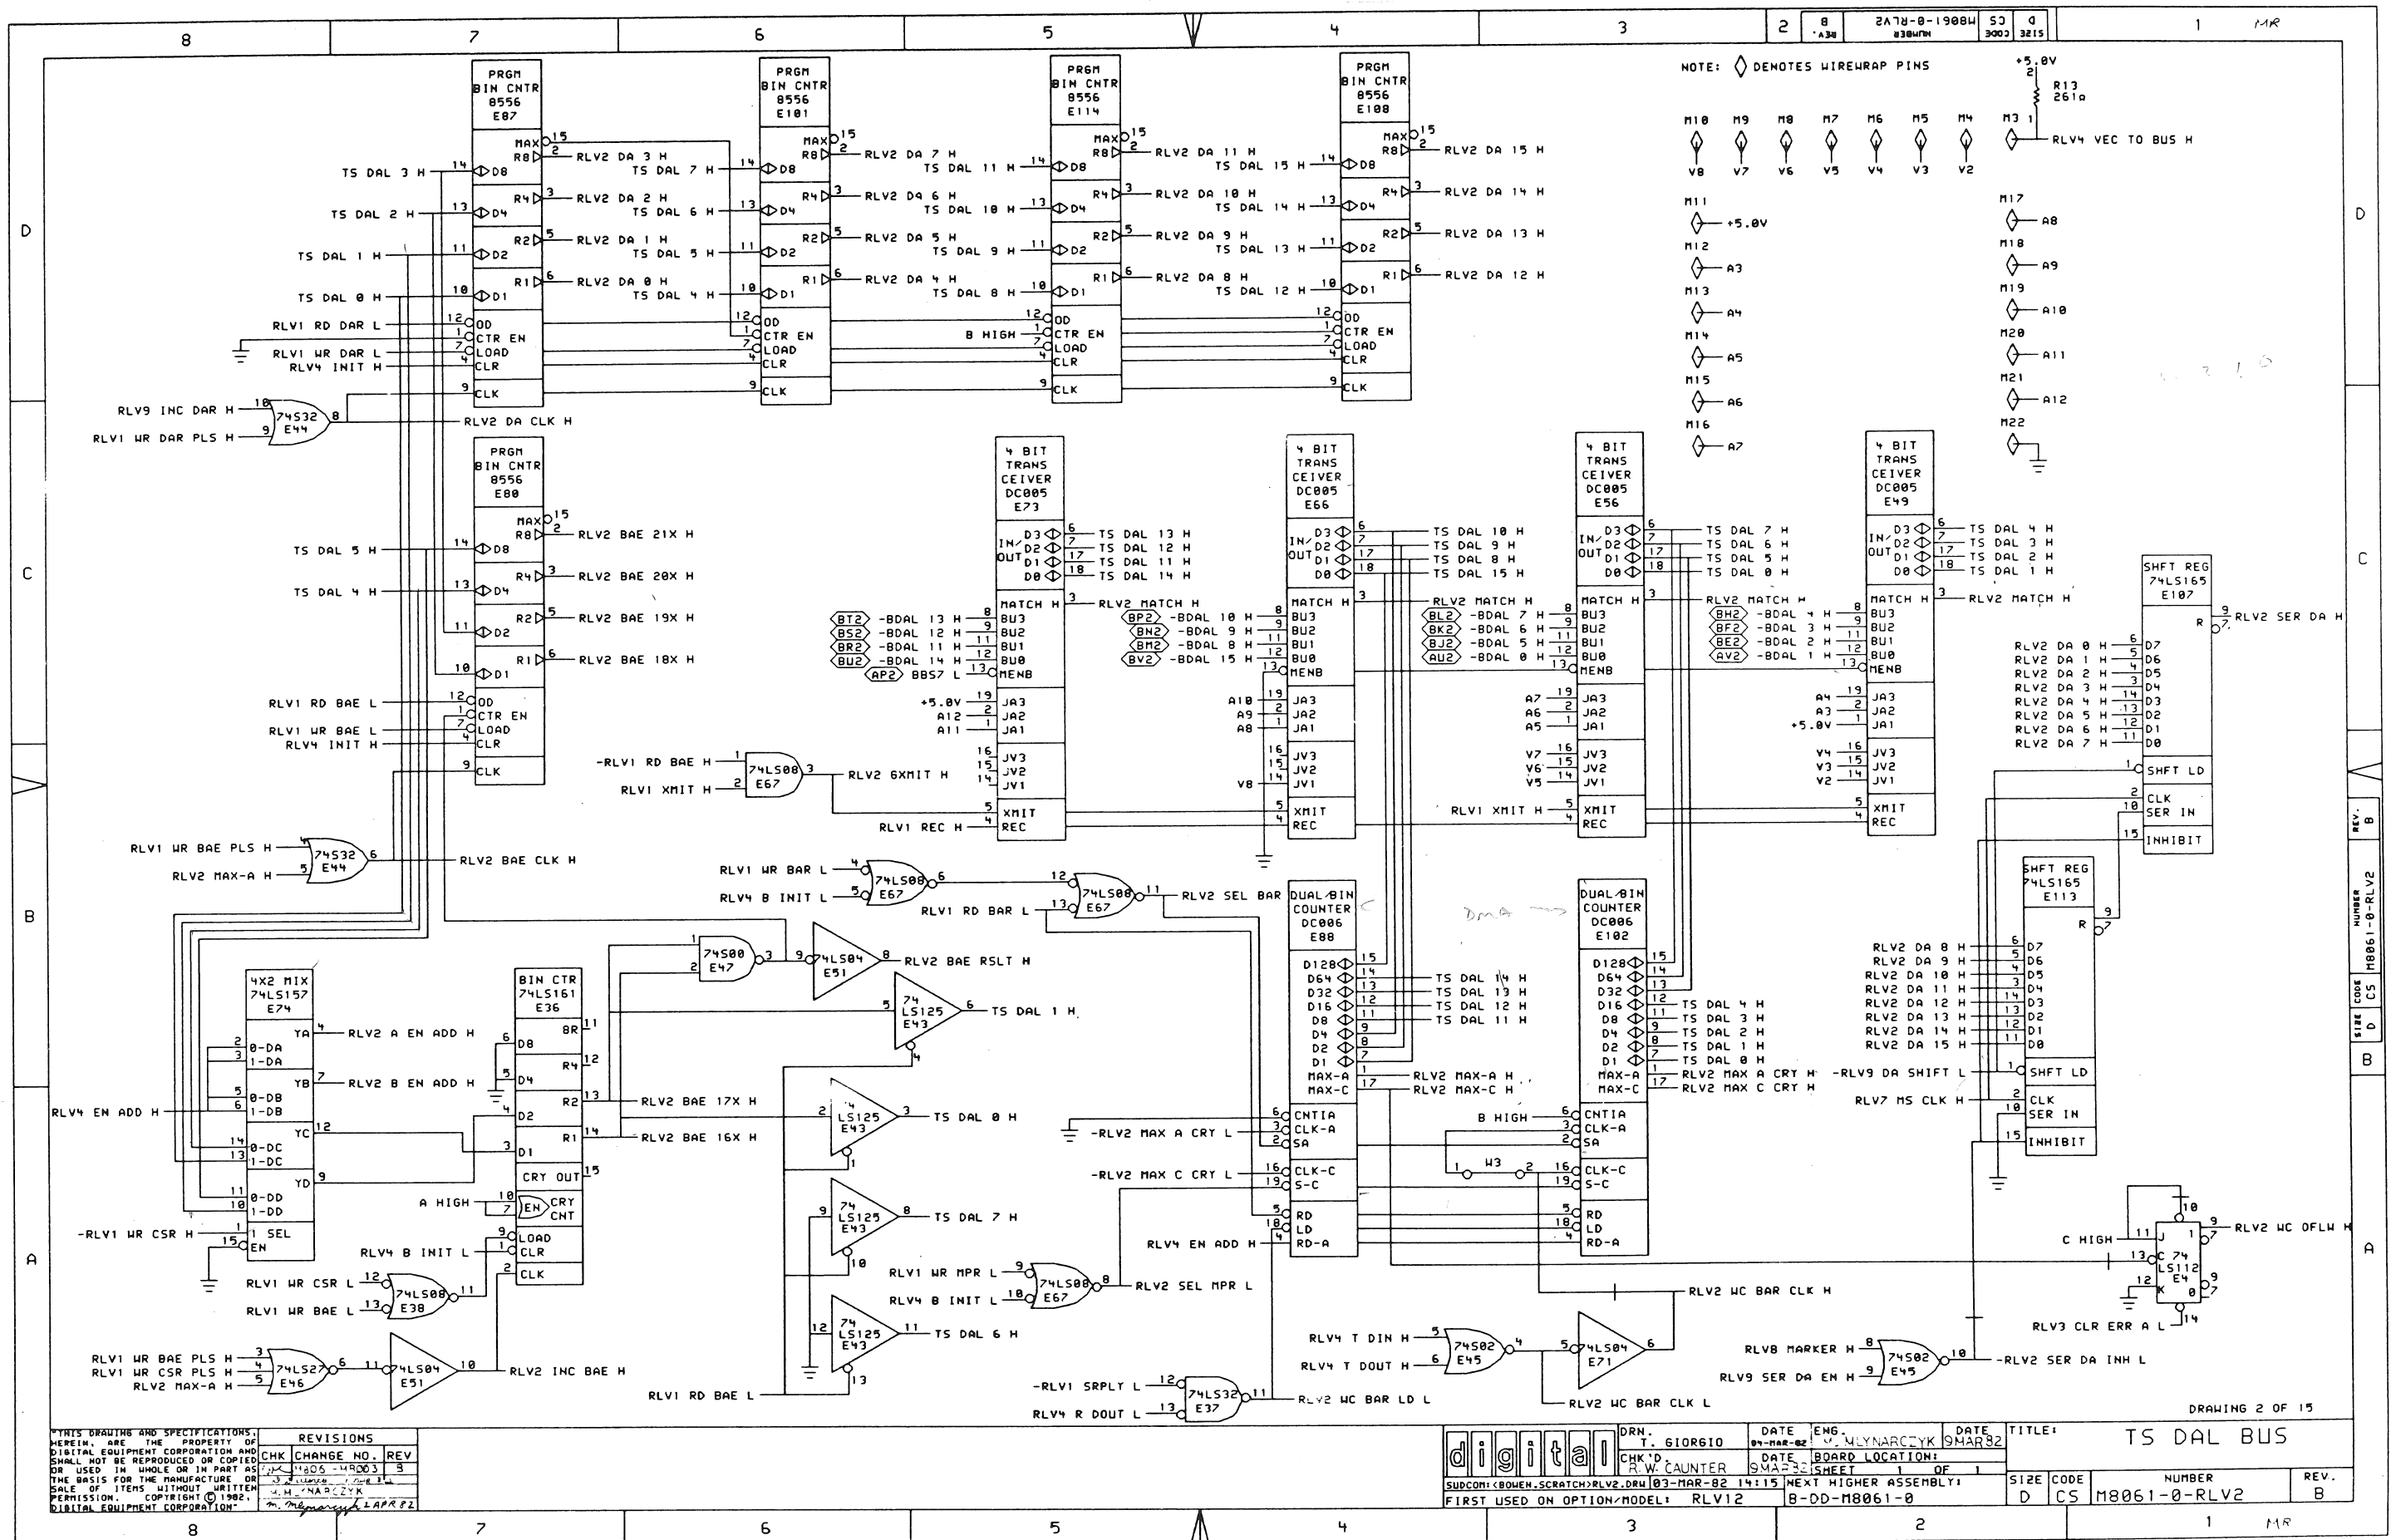

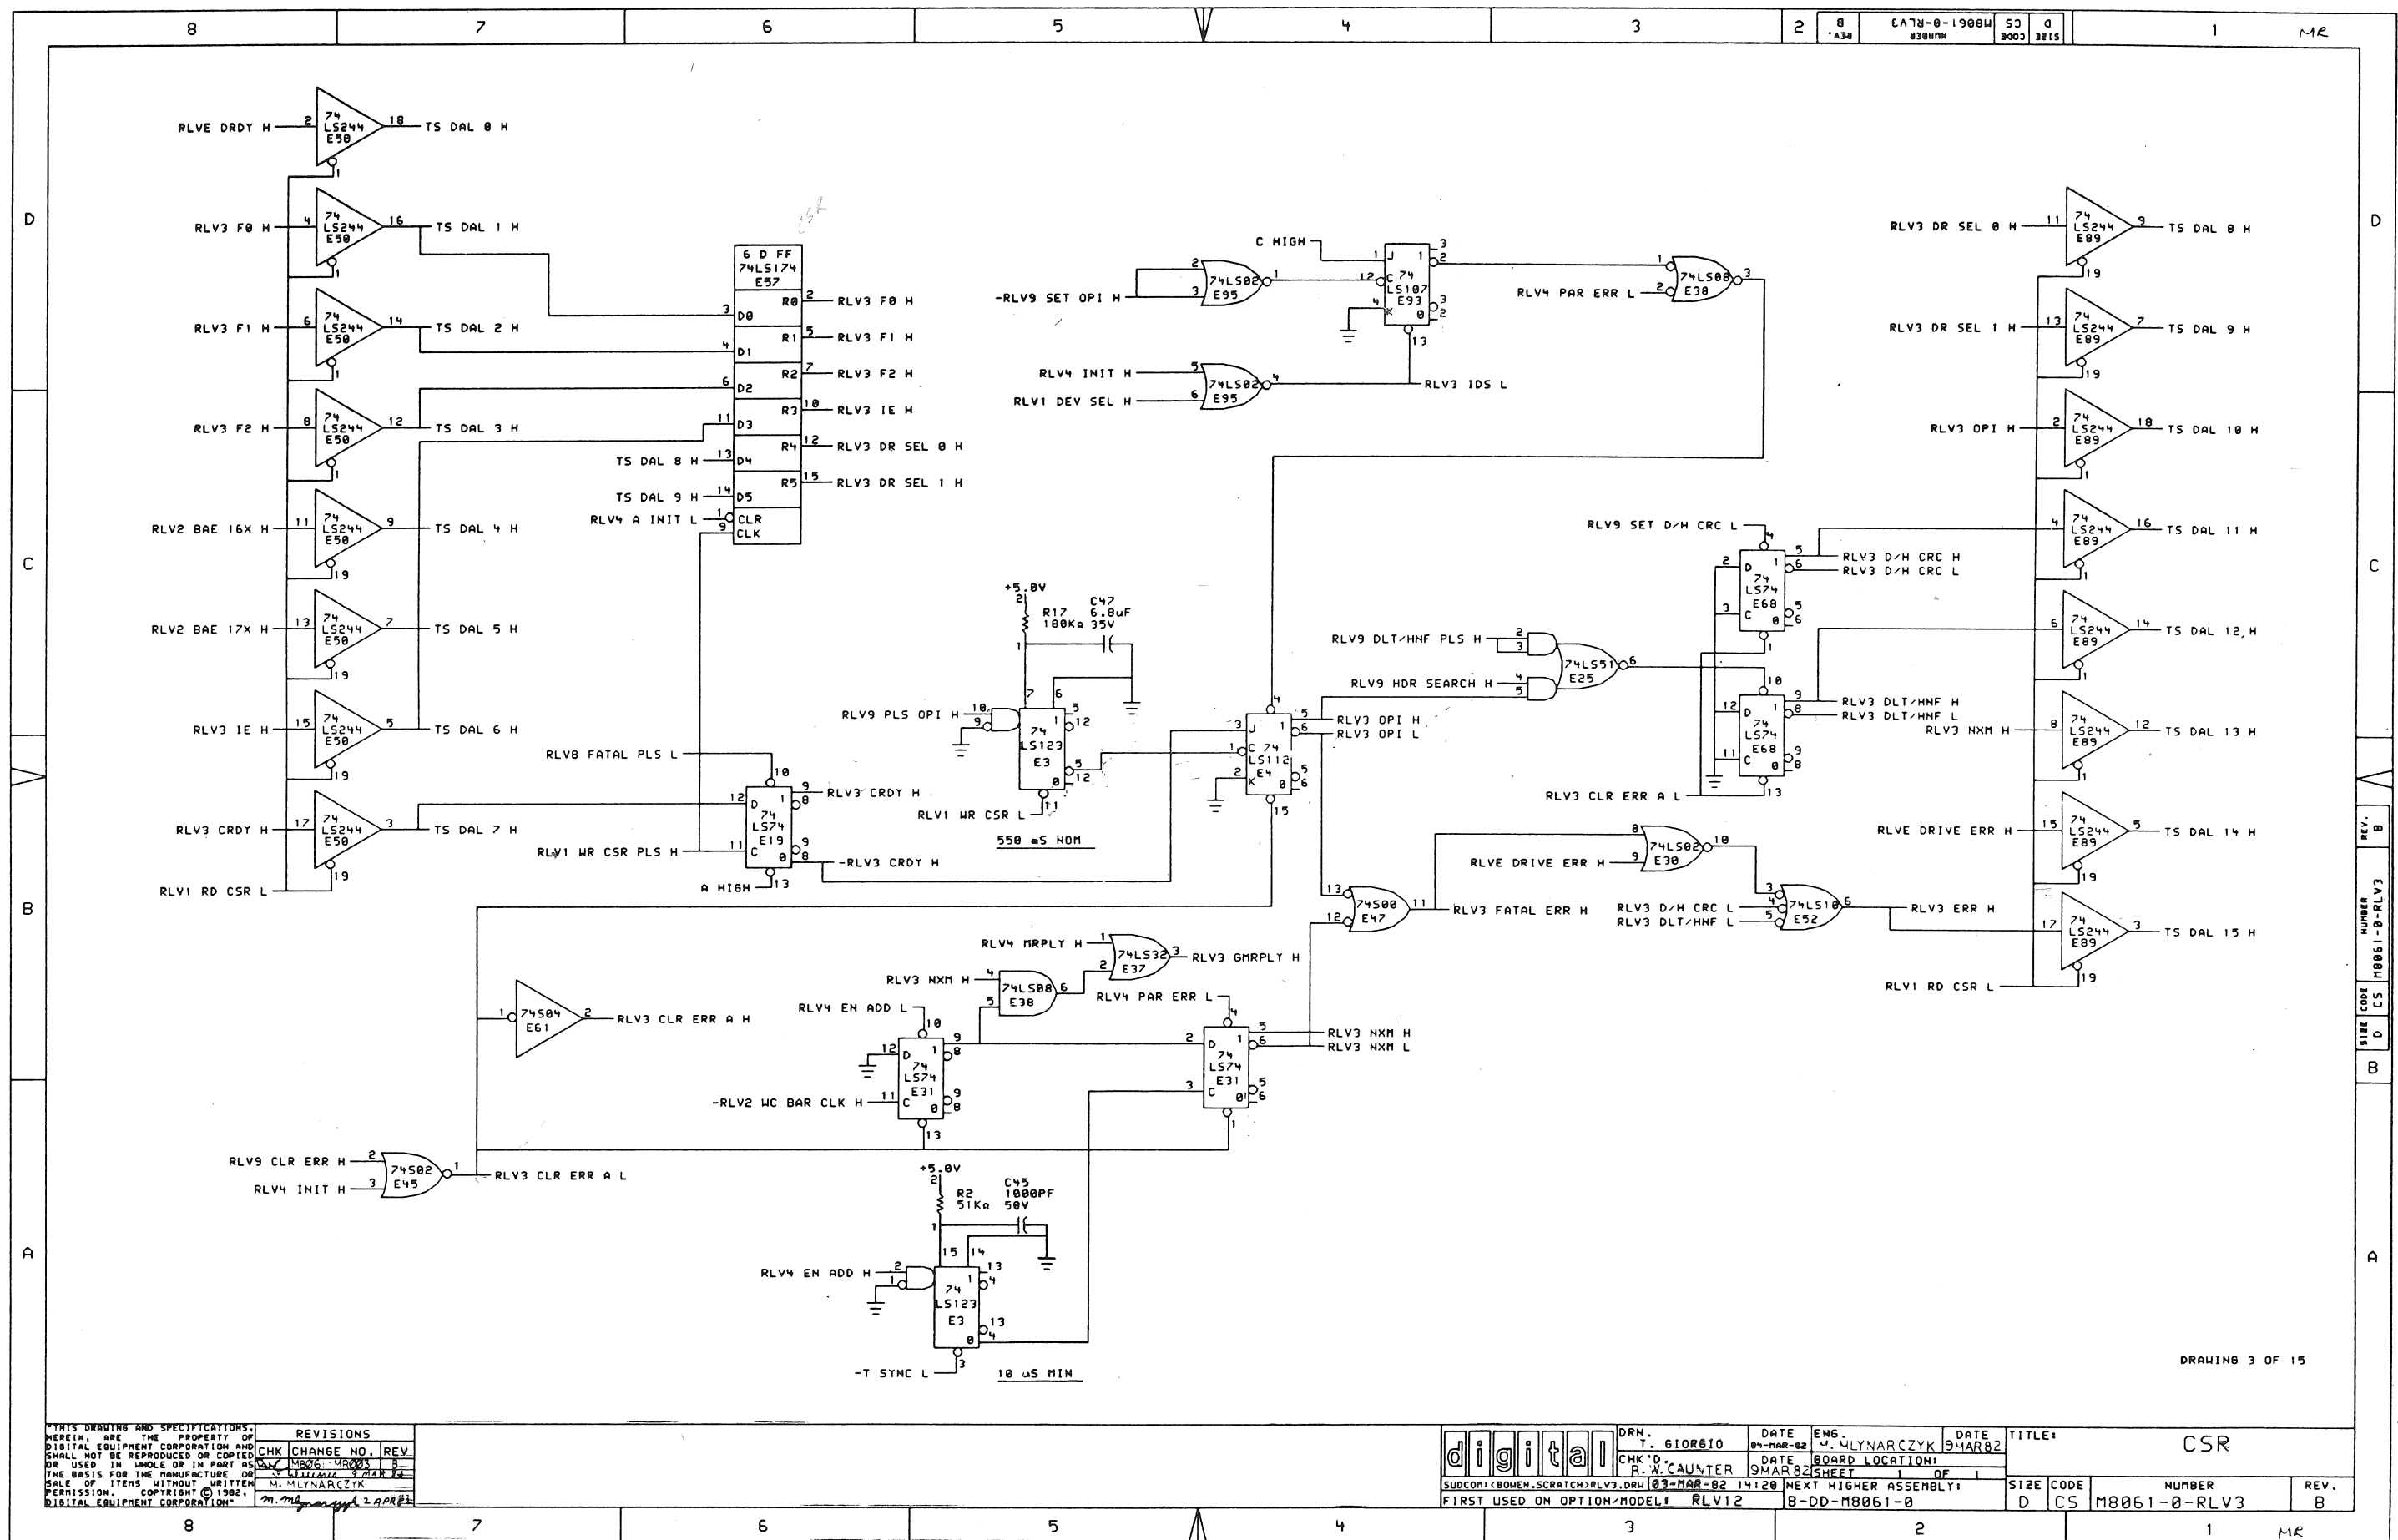


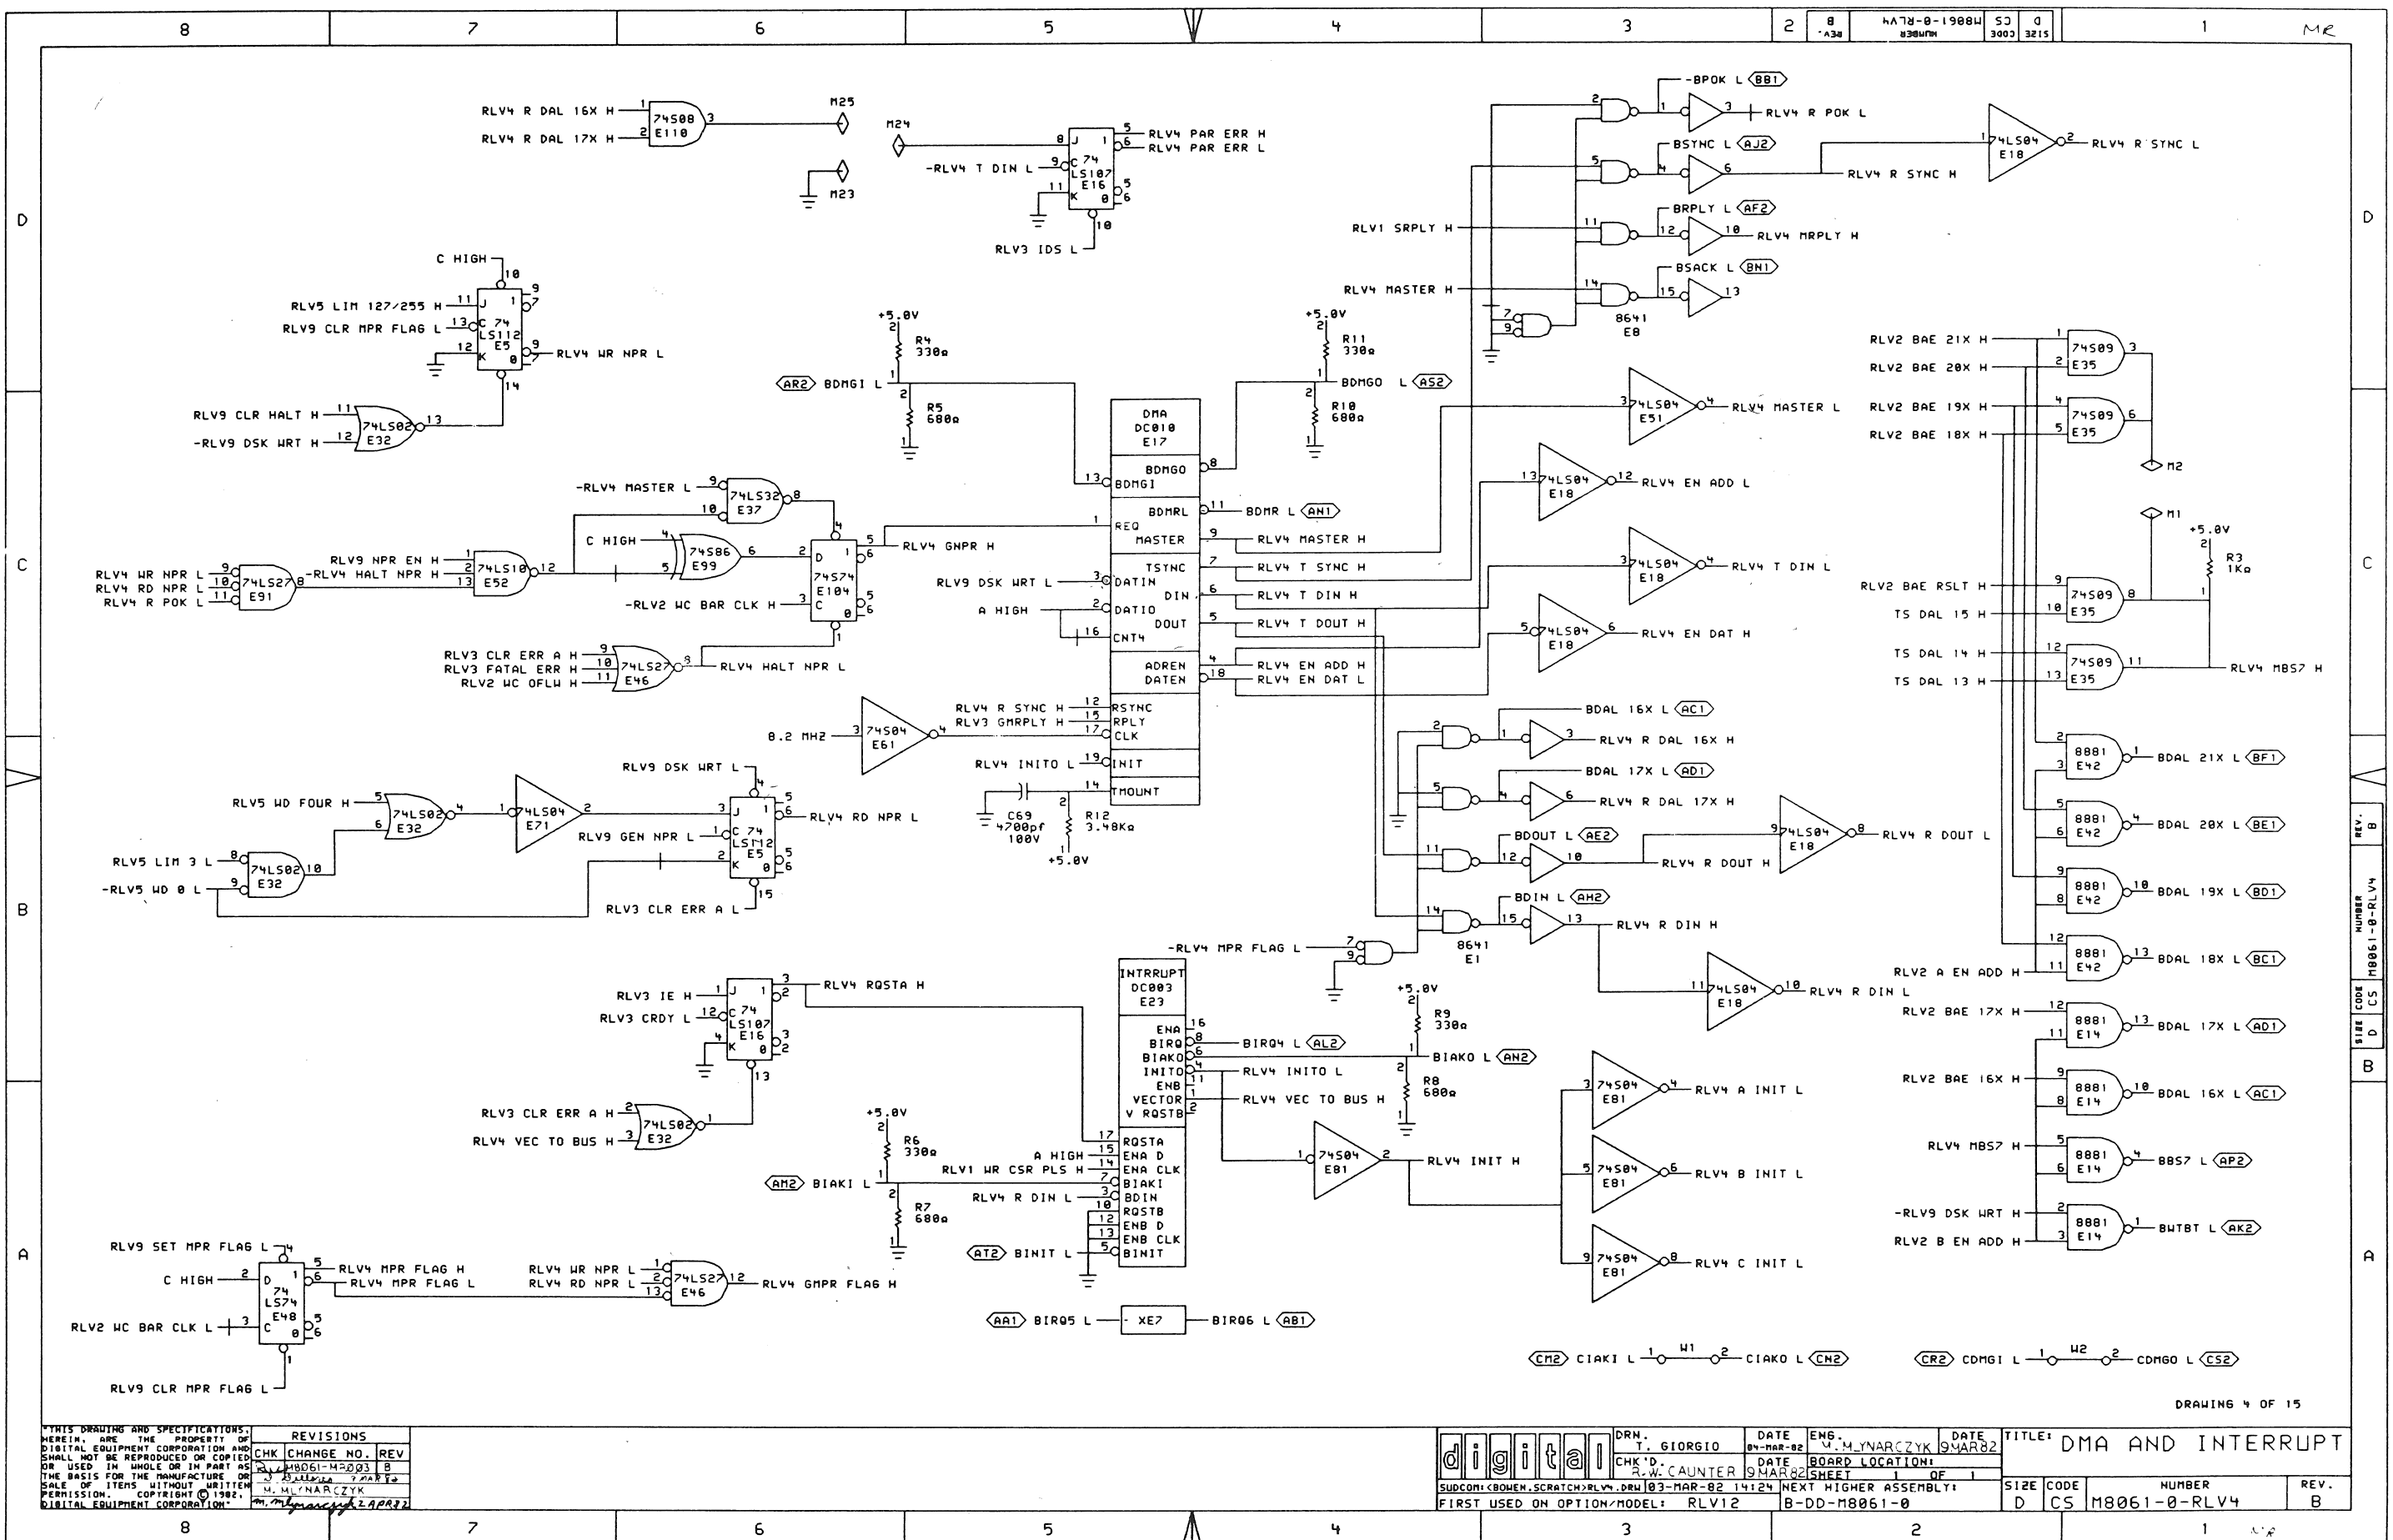

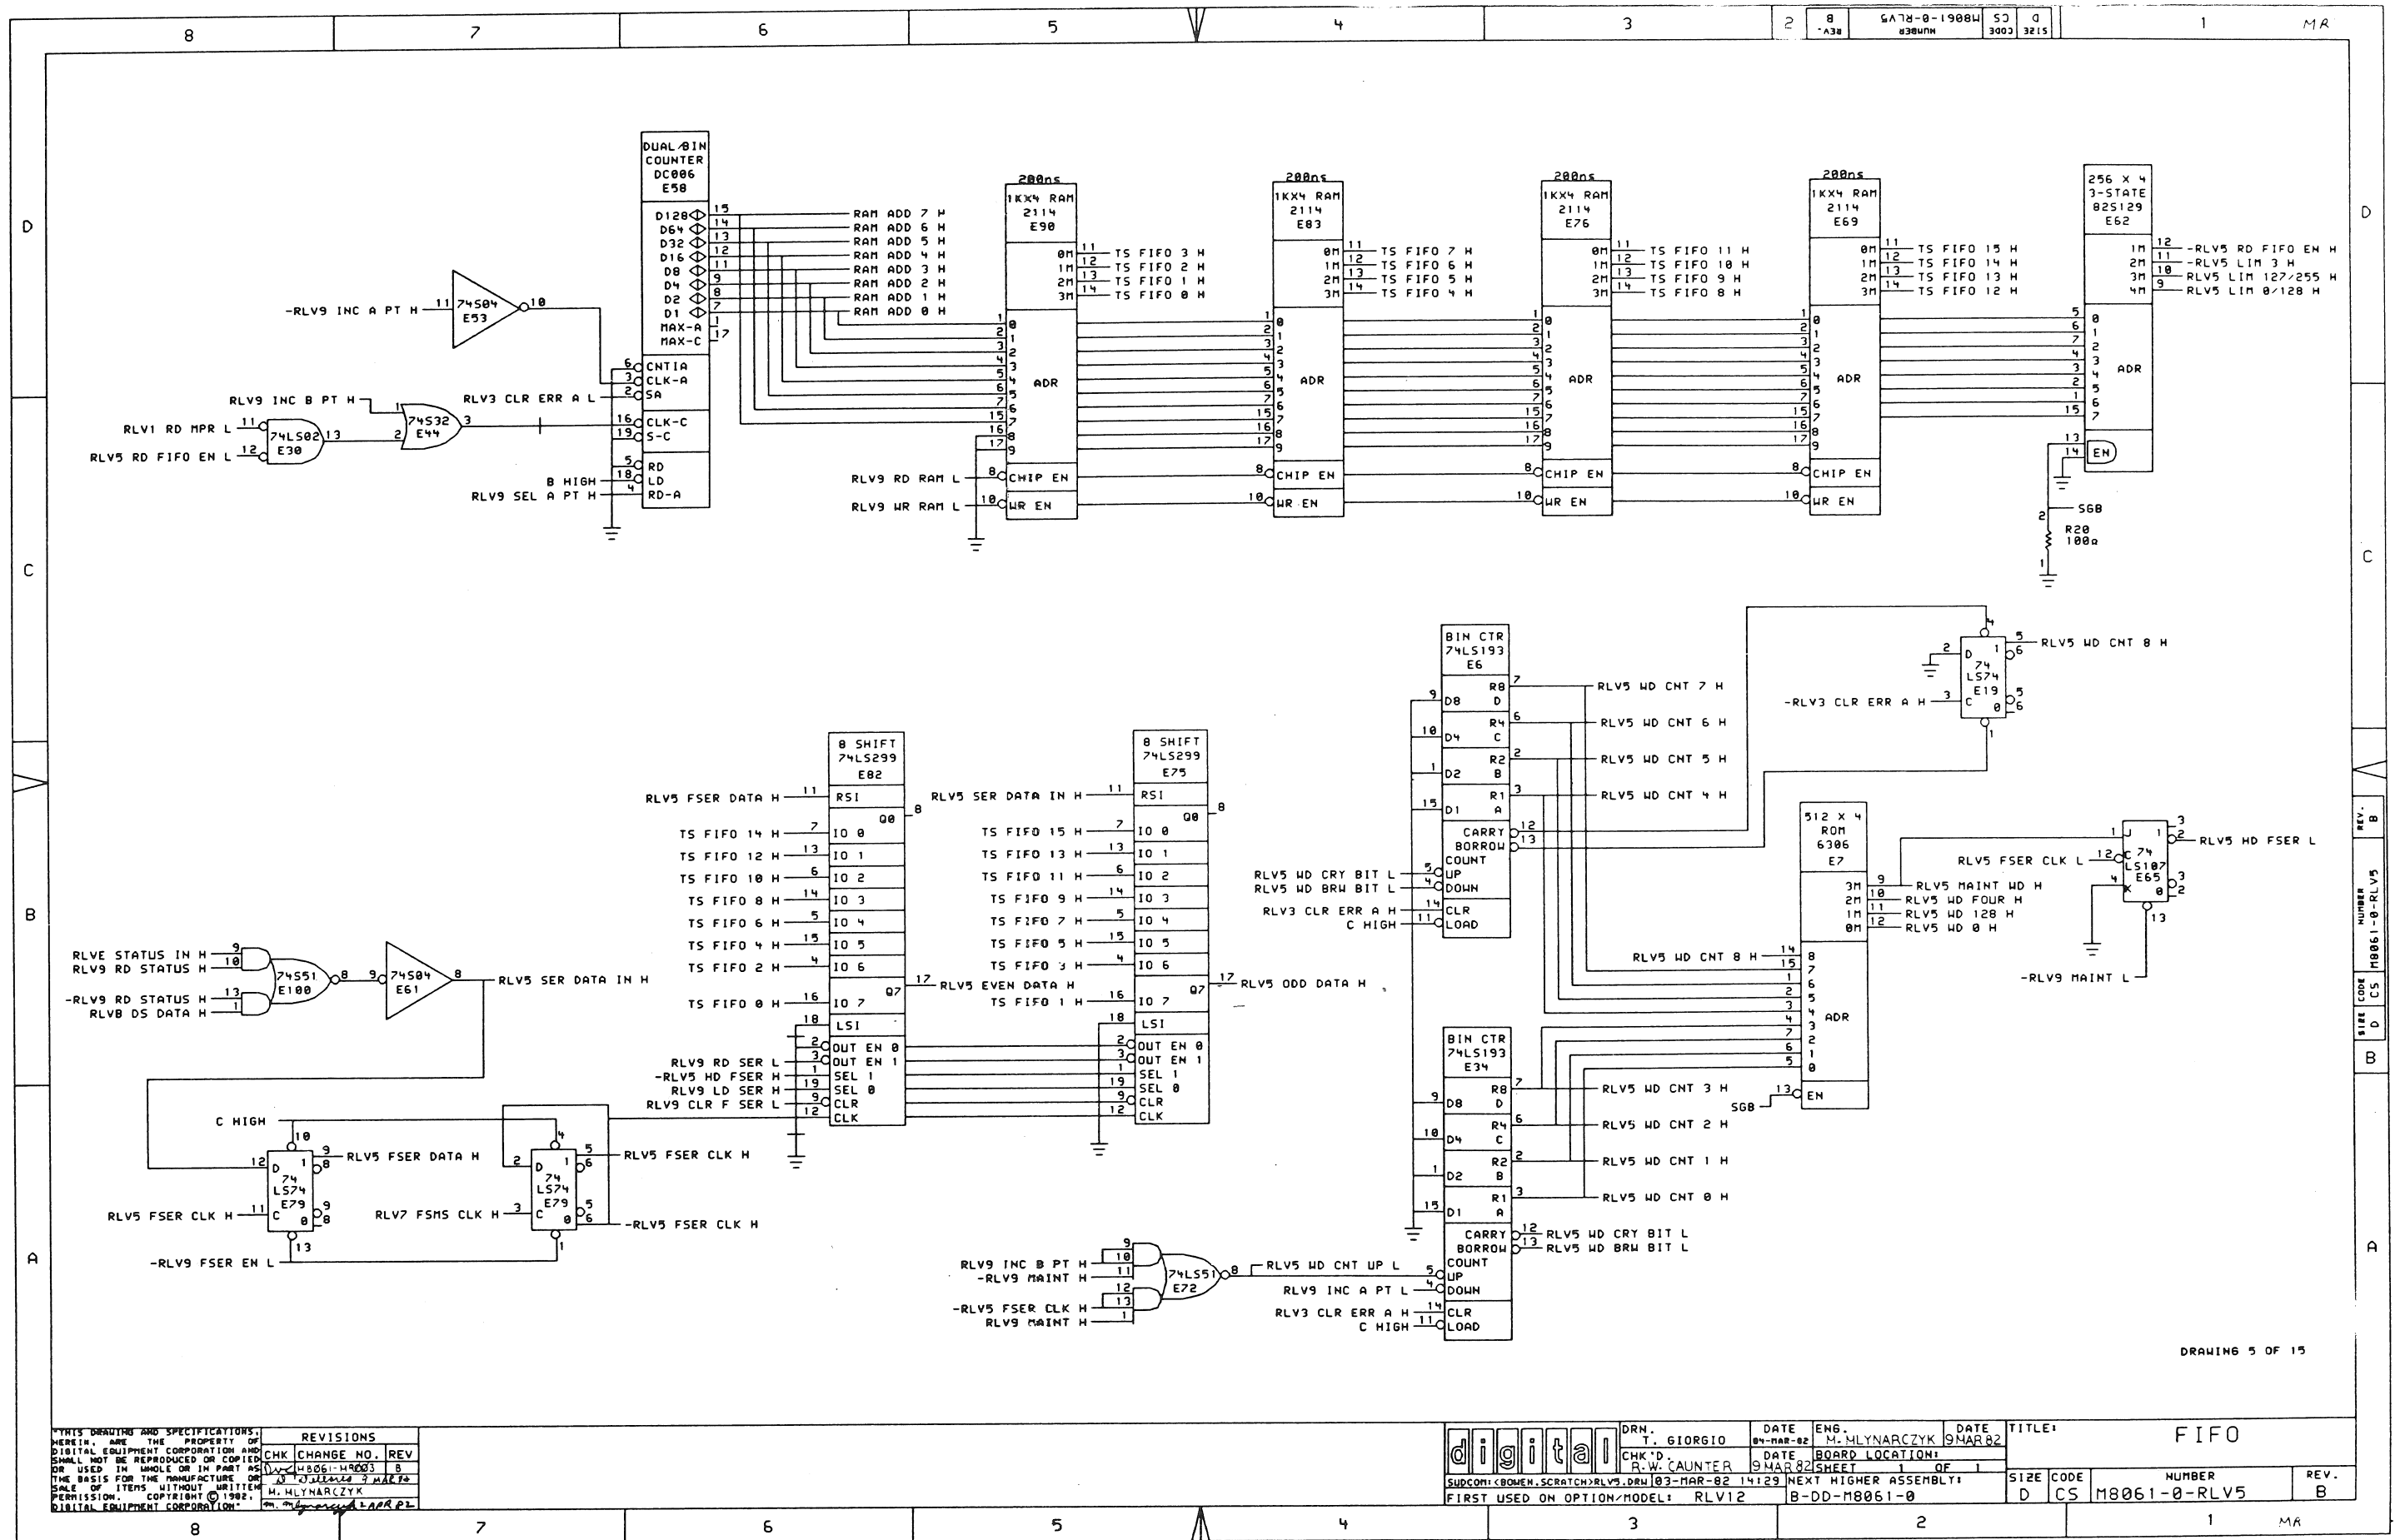


DRAWING 5 OF 15

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF DIGITAL EQUIPMENT CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. COPYRIGHT © 1982. DIGITAL EQUIPMENT CORPORATION.		REVISIONS CHK CHANGE NO. REV 148061-0003 8 H. MLYNARCYK 148061-0003 8		digital DRN. T. GIORGIO DATE 04-MAR-82 ENG. M. MLYNARCYK DATE 09-MAR-82 SHEET 1 OF 1 SUPCOM: (BOWEN, SCRATCH) RLV5.DRW 03-MAR-82 14129 NEXT HIGHER ASSEMBLY: FIRST USED ON OPTION/MODEL: RLV12 B-DD-M8061-0		TITLE: FIFO SIZE CODE: D CS NUMBER: M8061-0-RLV5 REV. B	
--	--	--	--	---	--	---	--

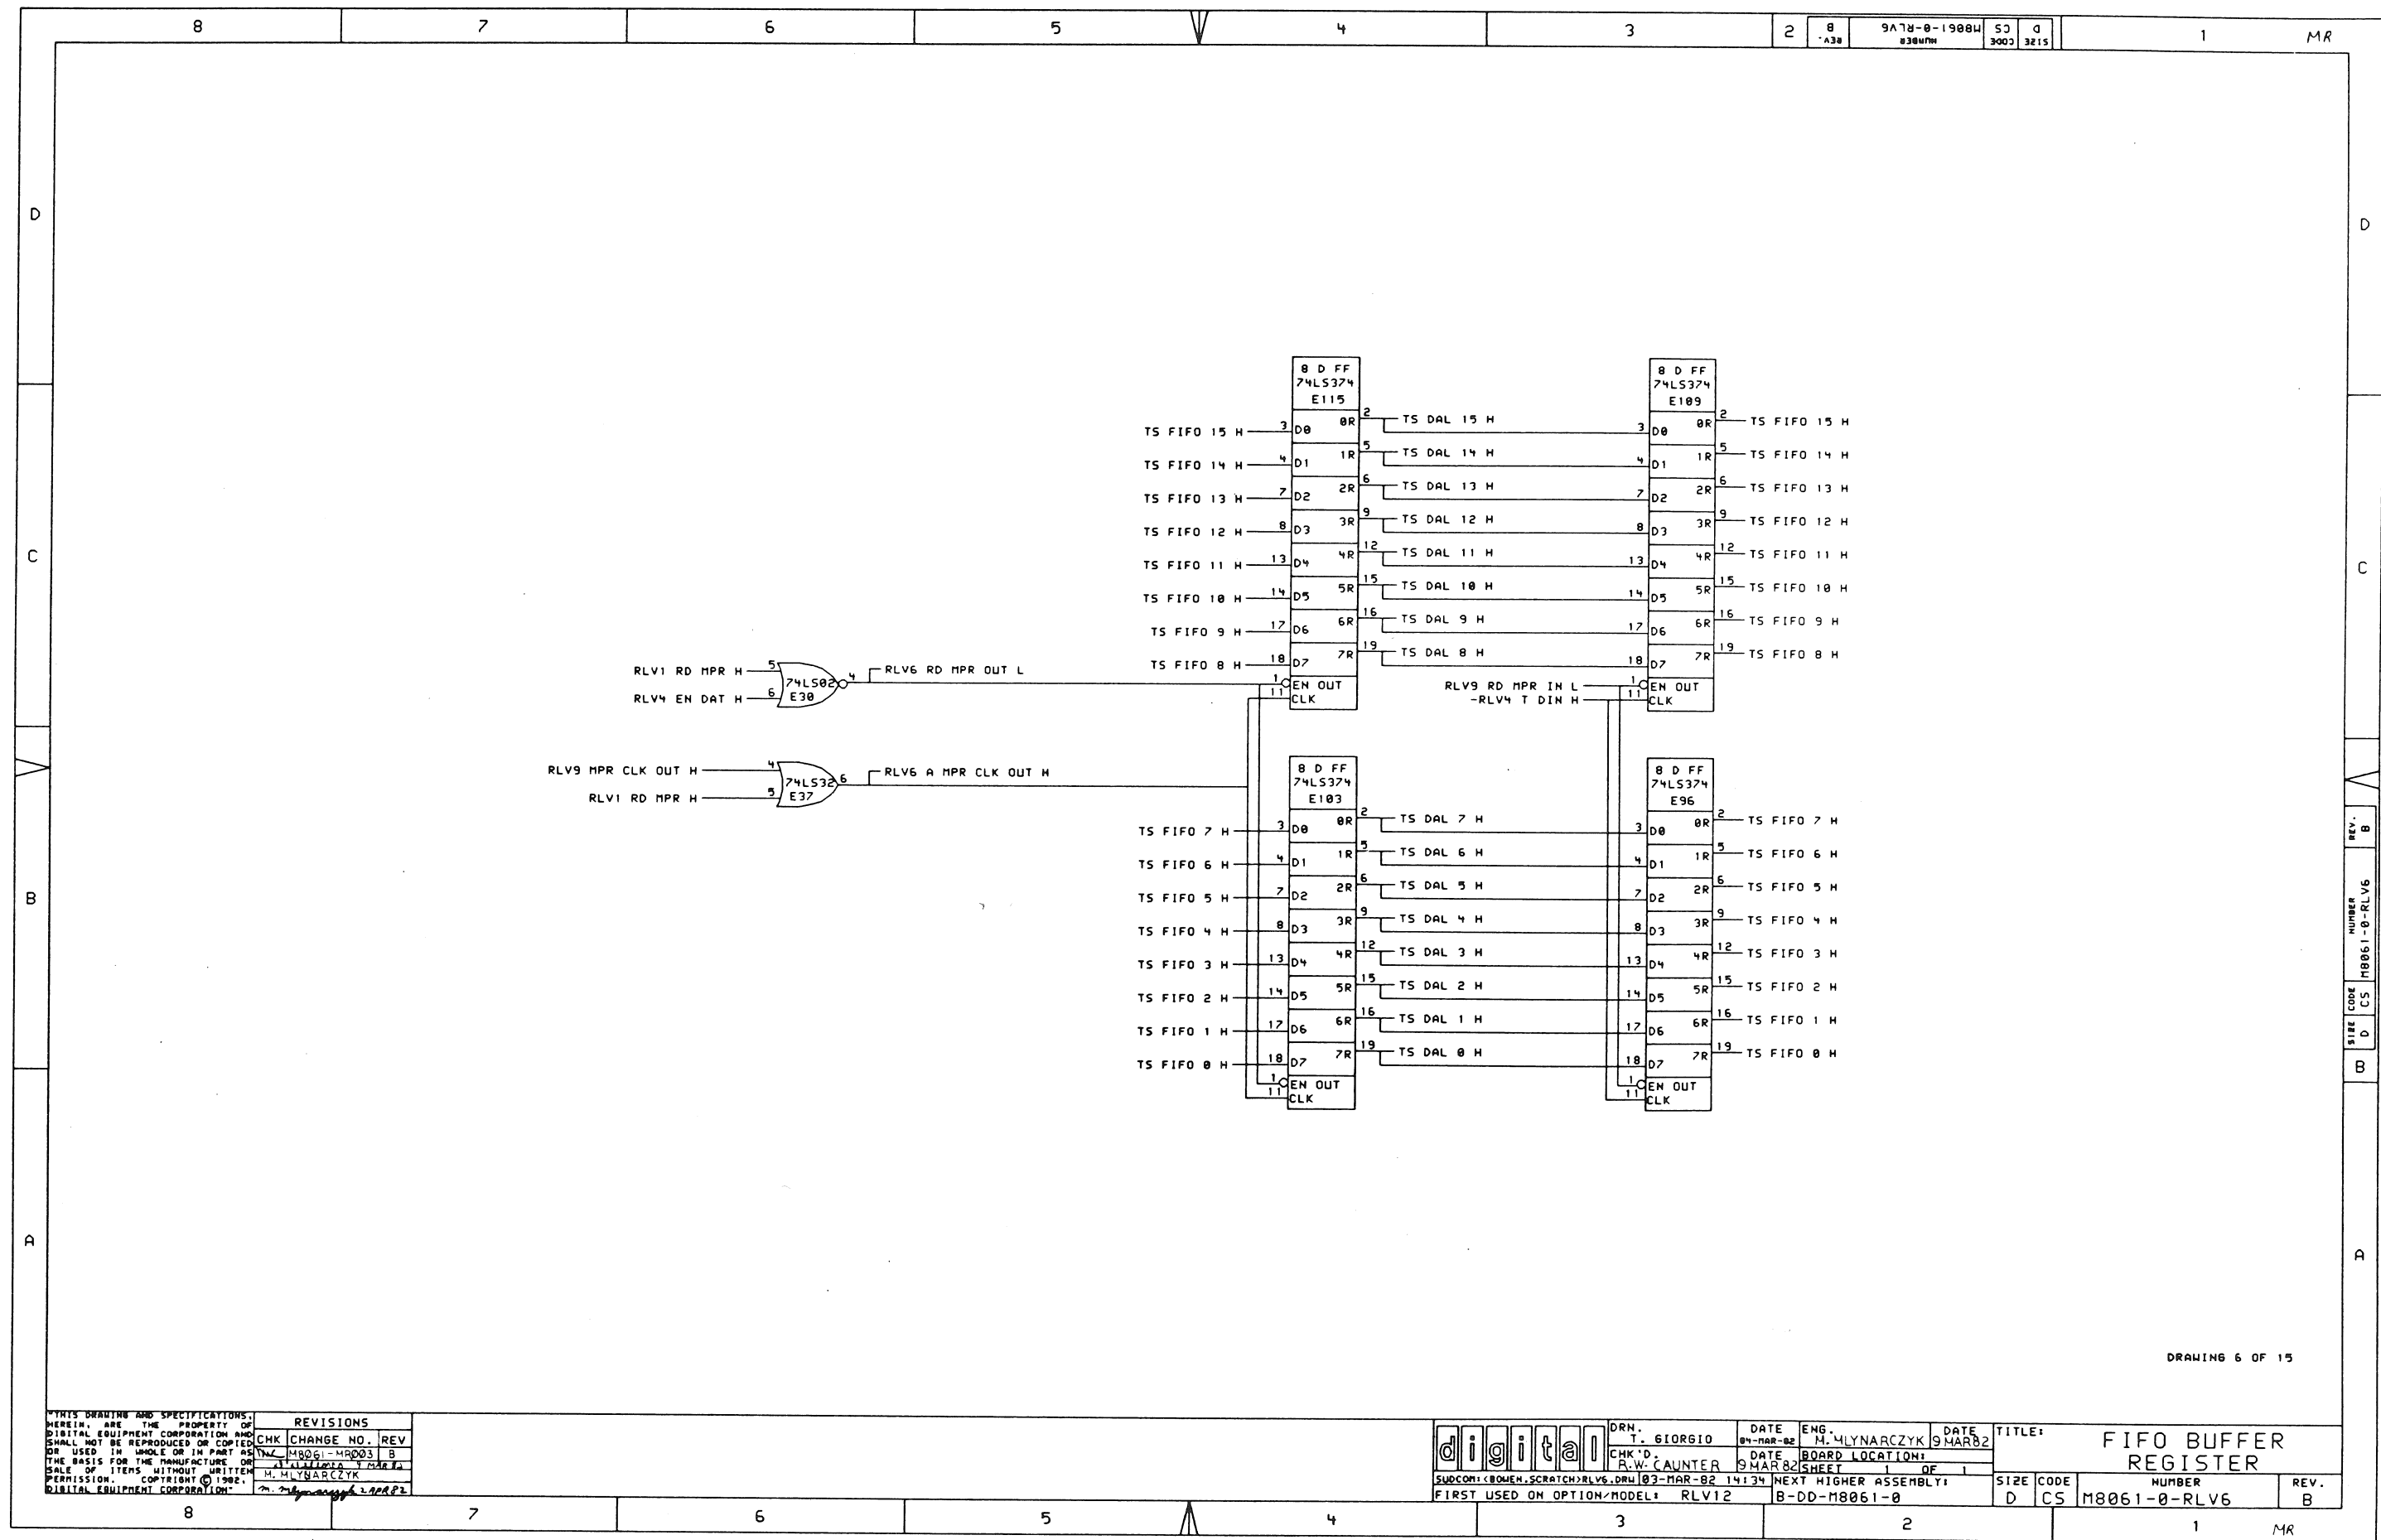



REVISIONS		
CHK	CHANGE NO.	REV
1	M8061-M8003	B
2	M8061-M8003	B
3	M8061-M8003	B
4	M8061-M8003	B
5	M8061-M8003	B
6	M8061-M8003	B
7	M8061-M8003	B
8	M8061-M8003	B


digital	DRN.	DATE	ENG.	DATE	TITLE: FIFO BUFFER REGISTER				
	T. GIORGIO	04-MAR-82	M. WYLYNARCZYK	09-MAR-82					
	CHK'D.	DATE	BOARD LOCATION:						
	R.W. CAUNTER	09-MAR-82	SHEET 1 OF 1						
SUDCOM: (BOWEN, SCRATCH) RLV6.DRW 03-MAR-82 14:34					NEXT HIGHER ASSEMBLY:				
FIRST USED ON OPTION/MODEL: RLV12					B-DD-M8061-0				
SIZE		CODE		NUMBER		REV.			
D		CS		M8061-0-RLV6		B			




digital	DRN.	T. GIORGIO	DATE	04-MAR-82	ENG.	M. MLYNARCZYK	DATE	04-MAR-82	TITLE:	MUX'S & CRC		
	CHK'D.	R.W. CAUNTER	DATE	04-MAR-82	BOARD LOCATION:							
SUBCOM: (BOHEM, SCRTCH) RLVL7, DRU1			03-MAR-82	14:38	NEXT HIGHER ASSEMBLY:			SIZE	CODE	NUMBER	REV.	
FIRST USED ON OPTION-MODEL:			RLV12			B-DD-M0061-0			D	CS	M0061-0-RLV7	C

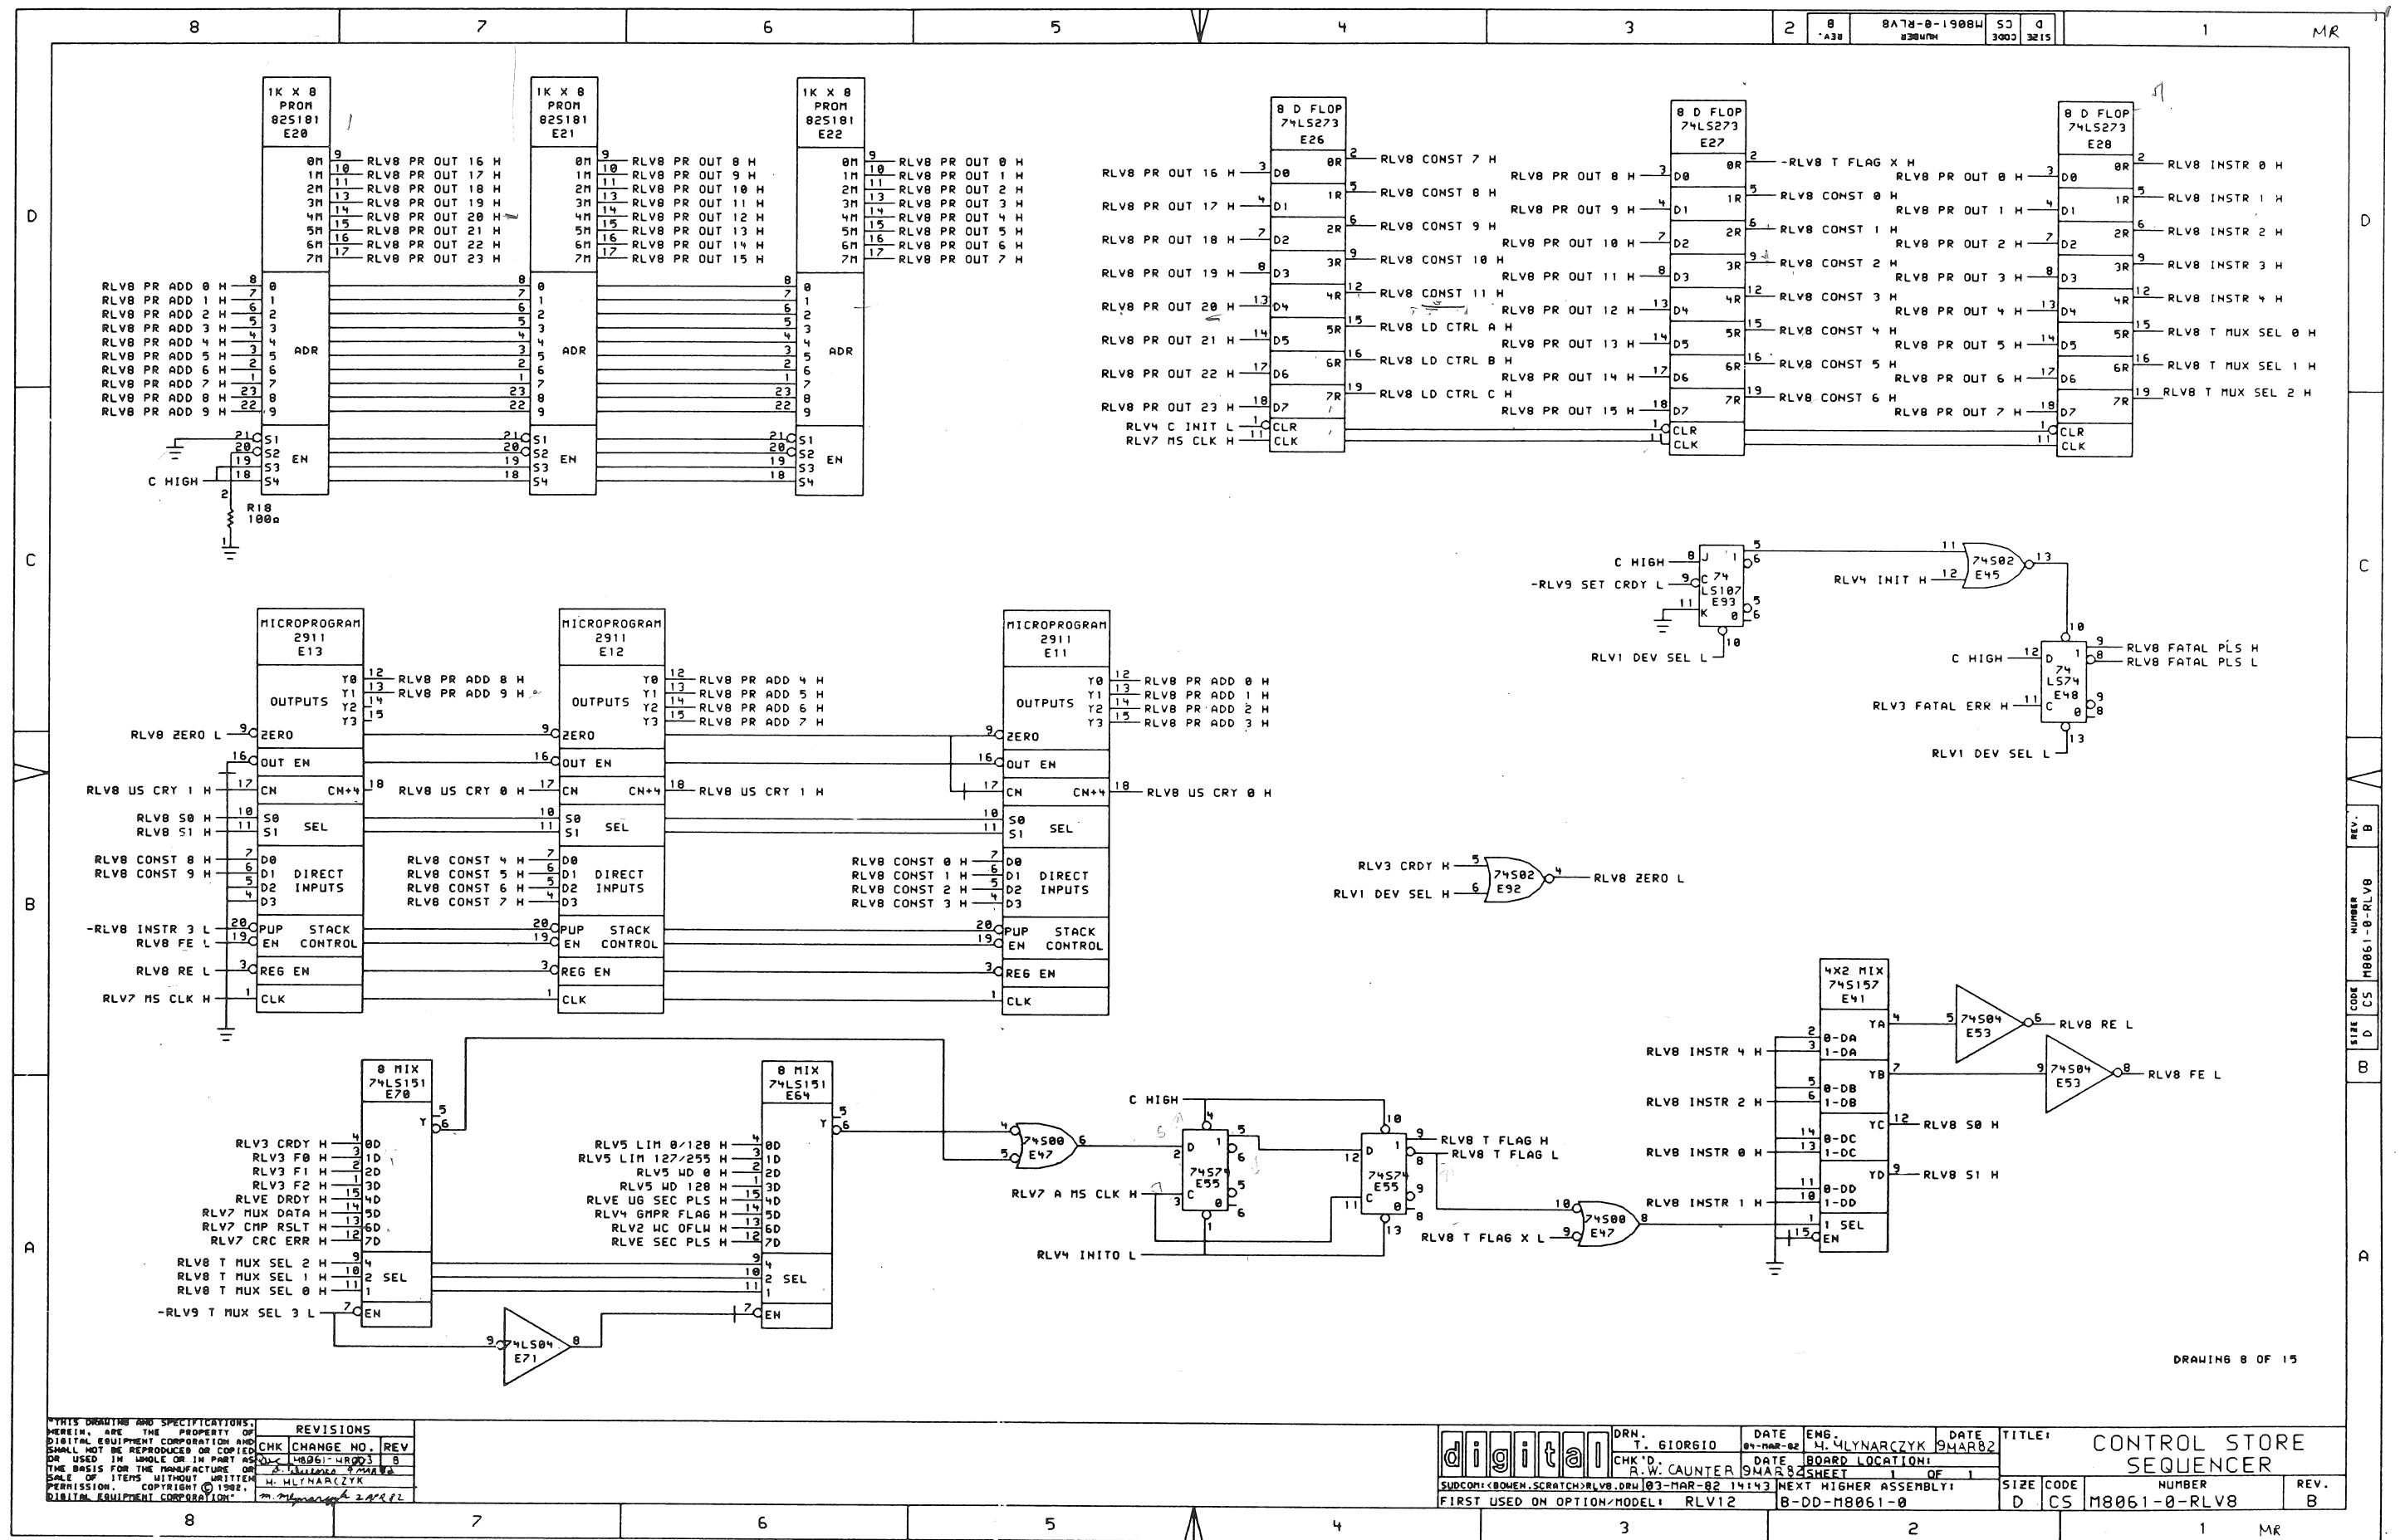


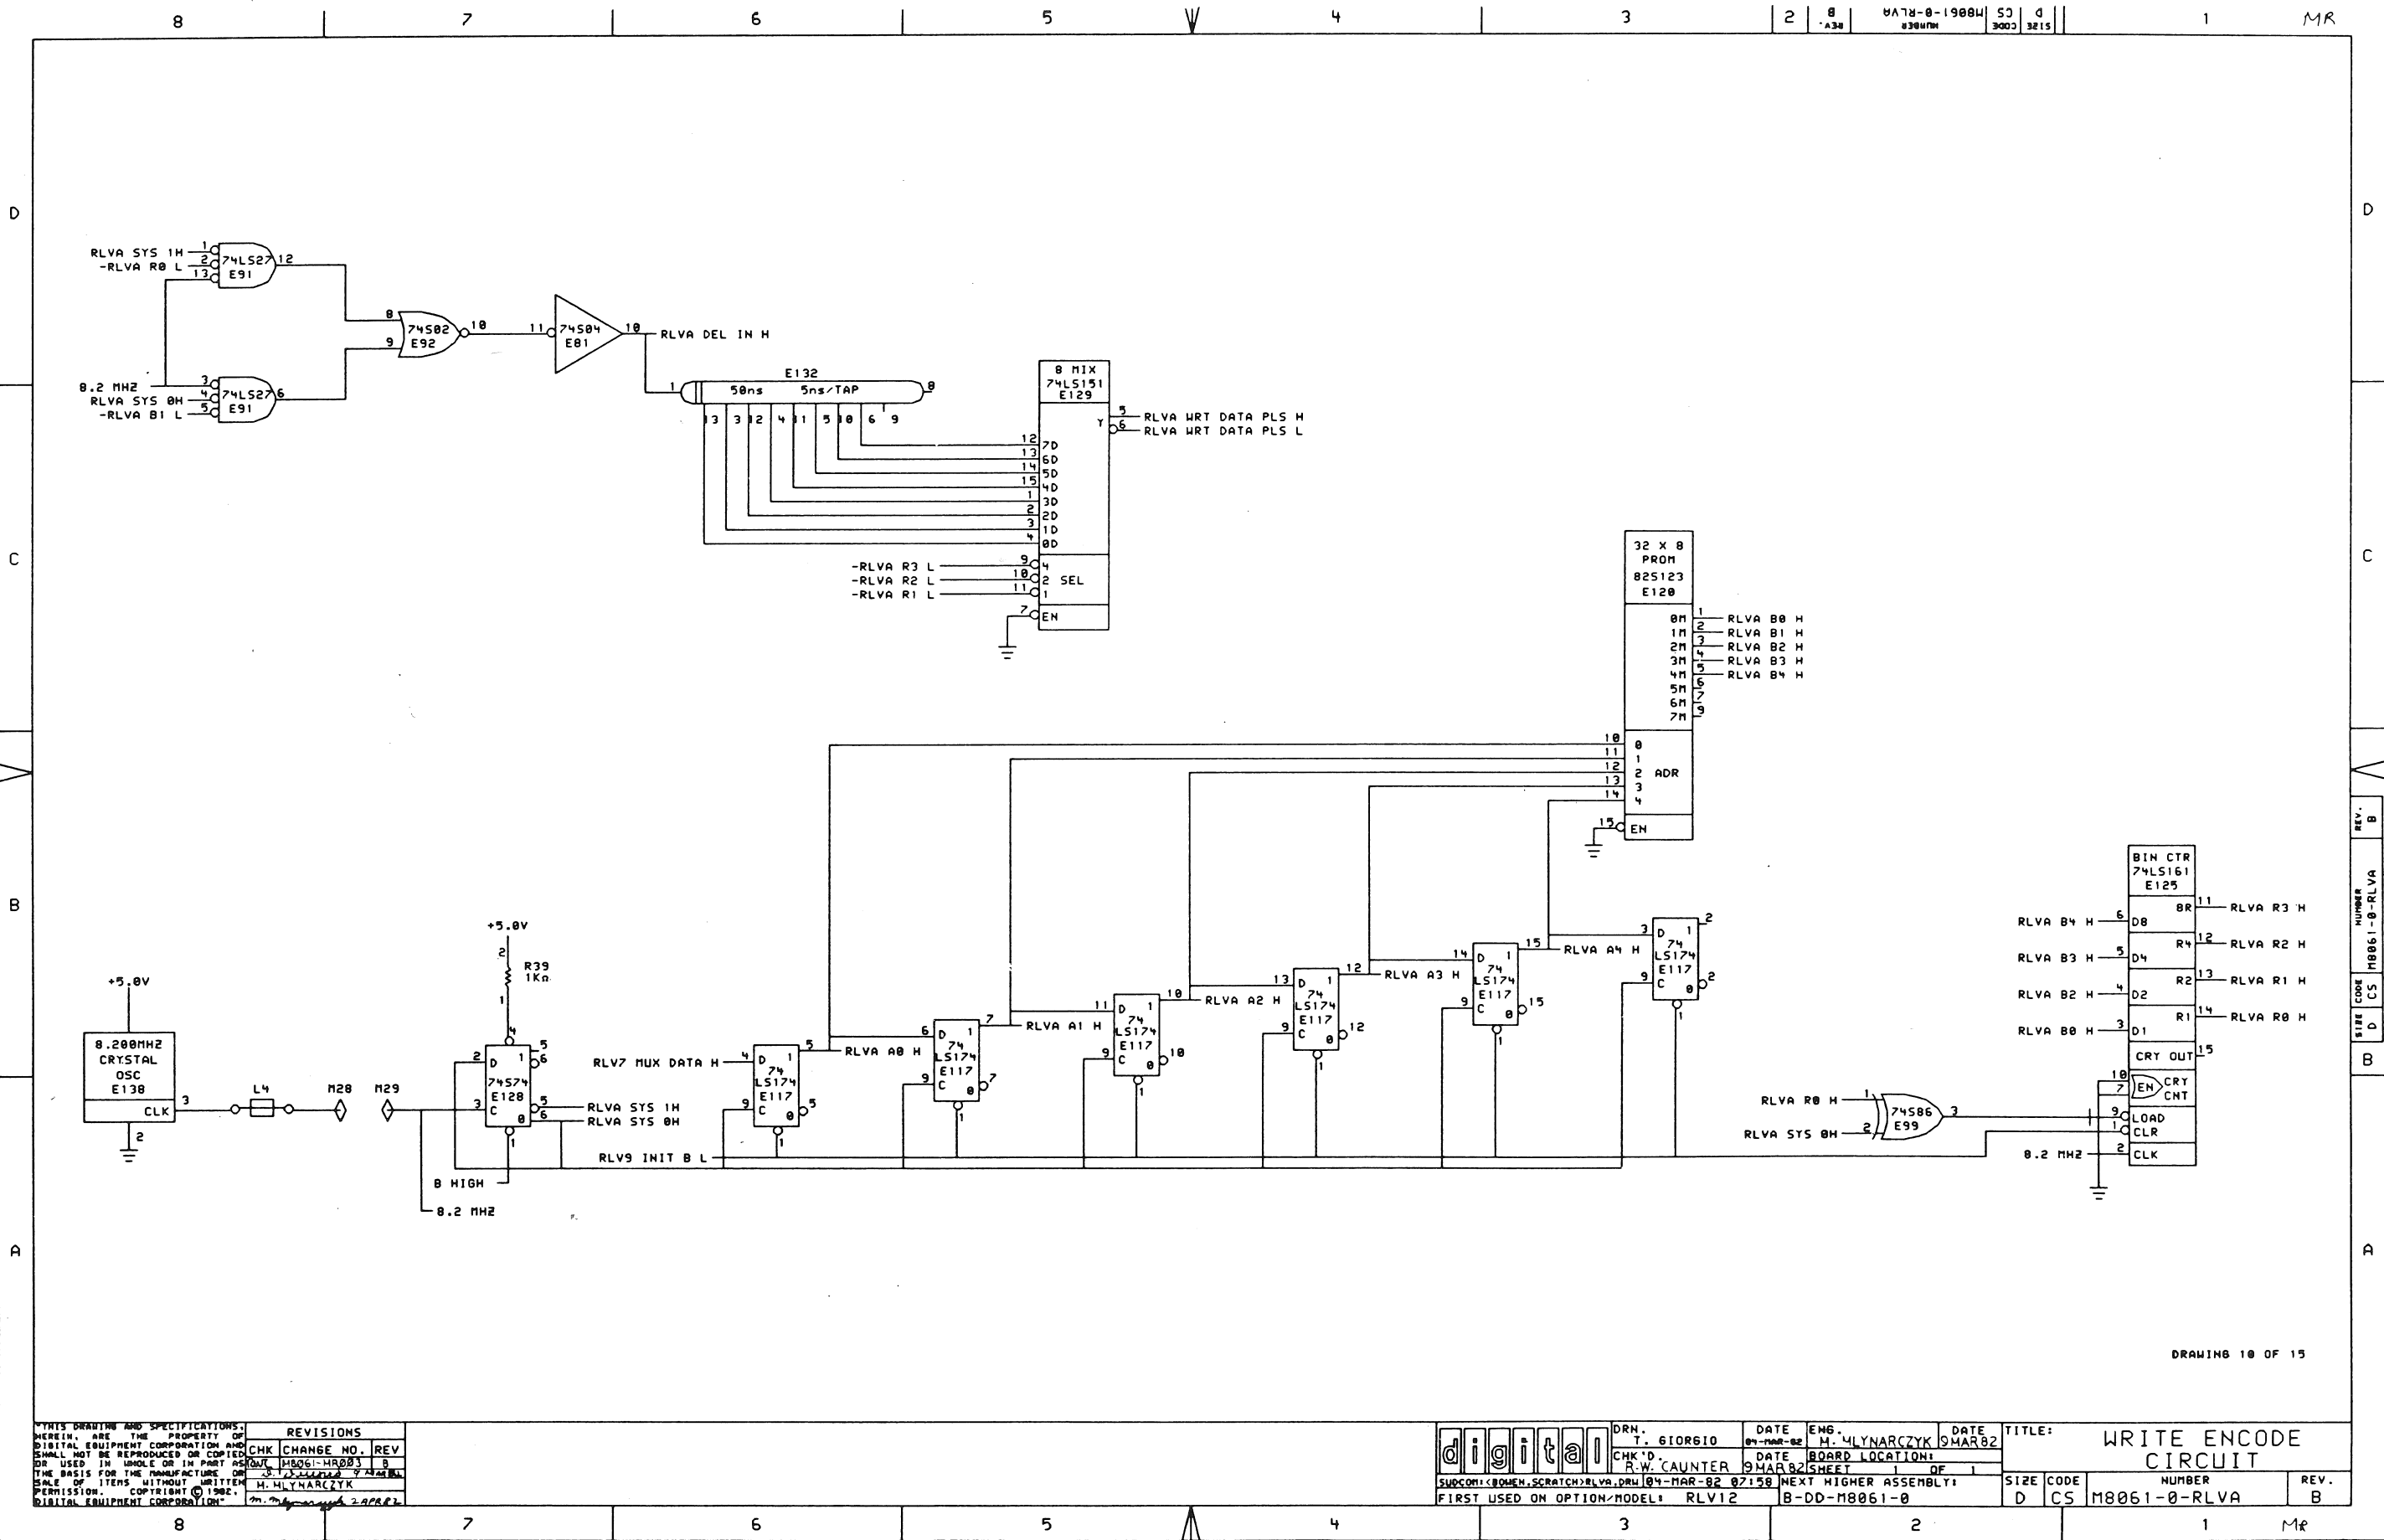

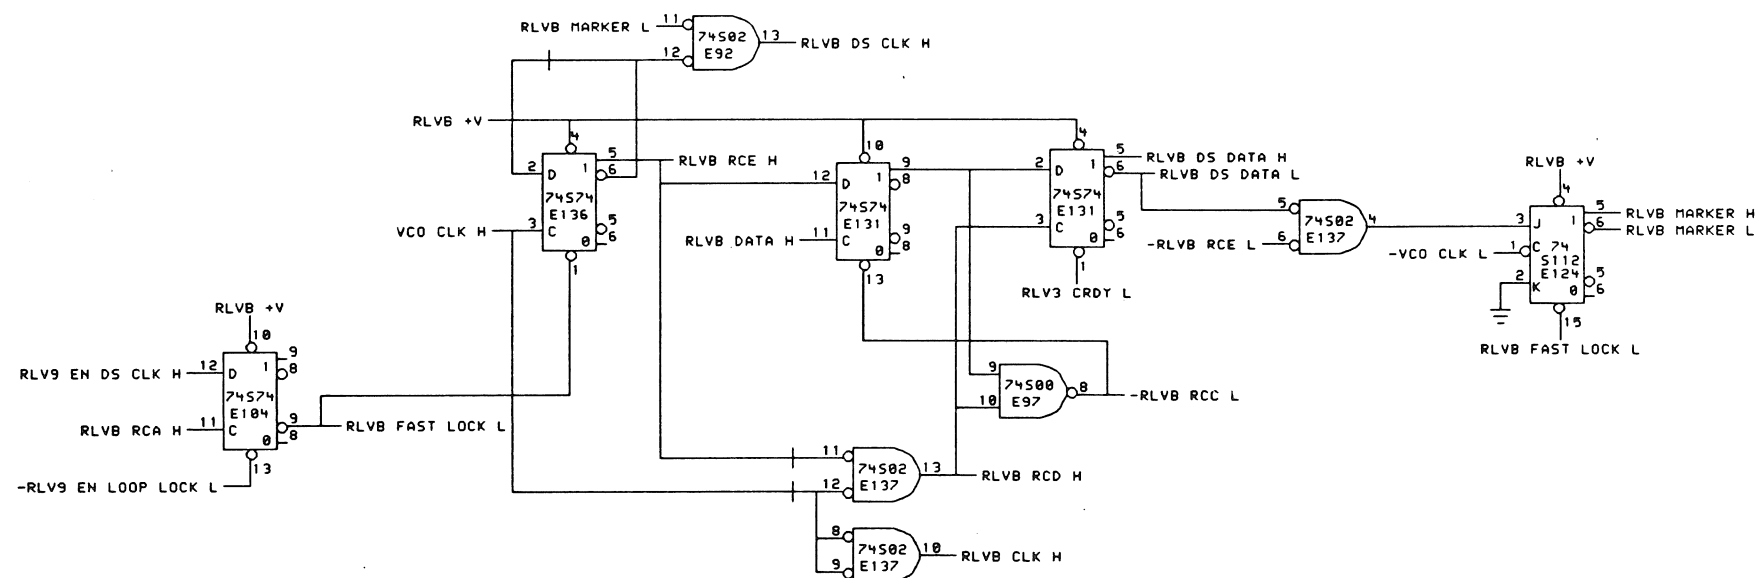

digital	DRN. T. 610R610	DATE 01-MAR-82	ENG. J. HLYNARCZYK	DATE 09-MAR-82	TITLE: READ CIRCUIT								
	CHK'D. R.W. CAUNTER	DATE 09-MAR-82	BOARD LOCATION: SHEET 1 OF 1										
SUBCOM: (BOWEN, SCRATCH) RLVB, DRW		03-MAR-82 14:50	NEXT HIGHER ASSEMBLY: B-DD-M8061-0		<table border="1"> <tr> <th>SIZE</th> <th>CODE</th> <th>NUMBER</th> <th>REV.</th> </tr> <tr> <td>D</td> <td>C5</td> <td>M8061-0-RLVB</td> <td>B</td> </tr> </table>	SIZE	CODE	NUMBER	REV.	D	C5	M8061-0-RLVB	B
SIZE	CODE	NUMBER	REV.										
D	C5	M8061-0-RLVB	B										
FIRST USED ON OPTION/MODEL: RLV12													

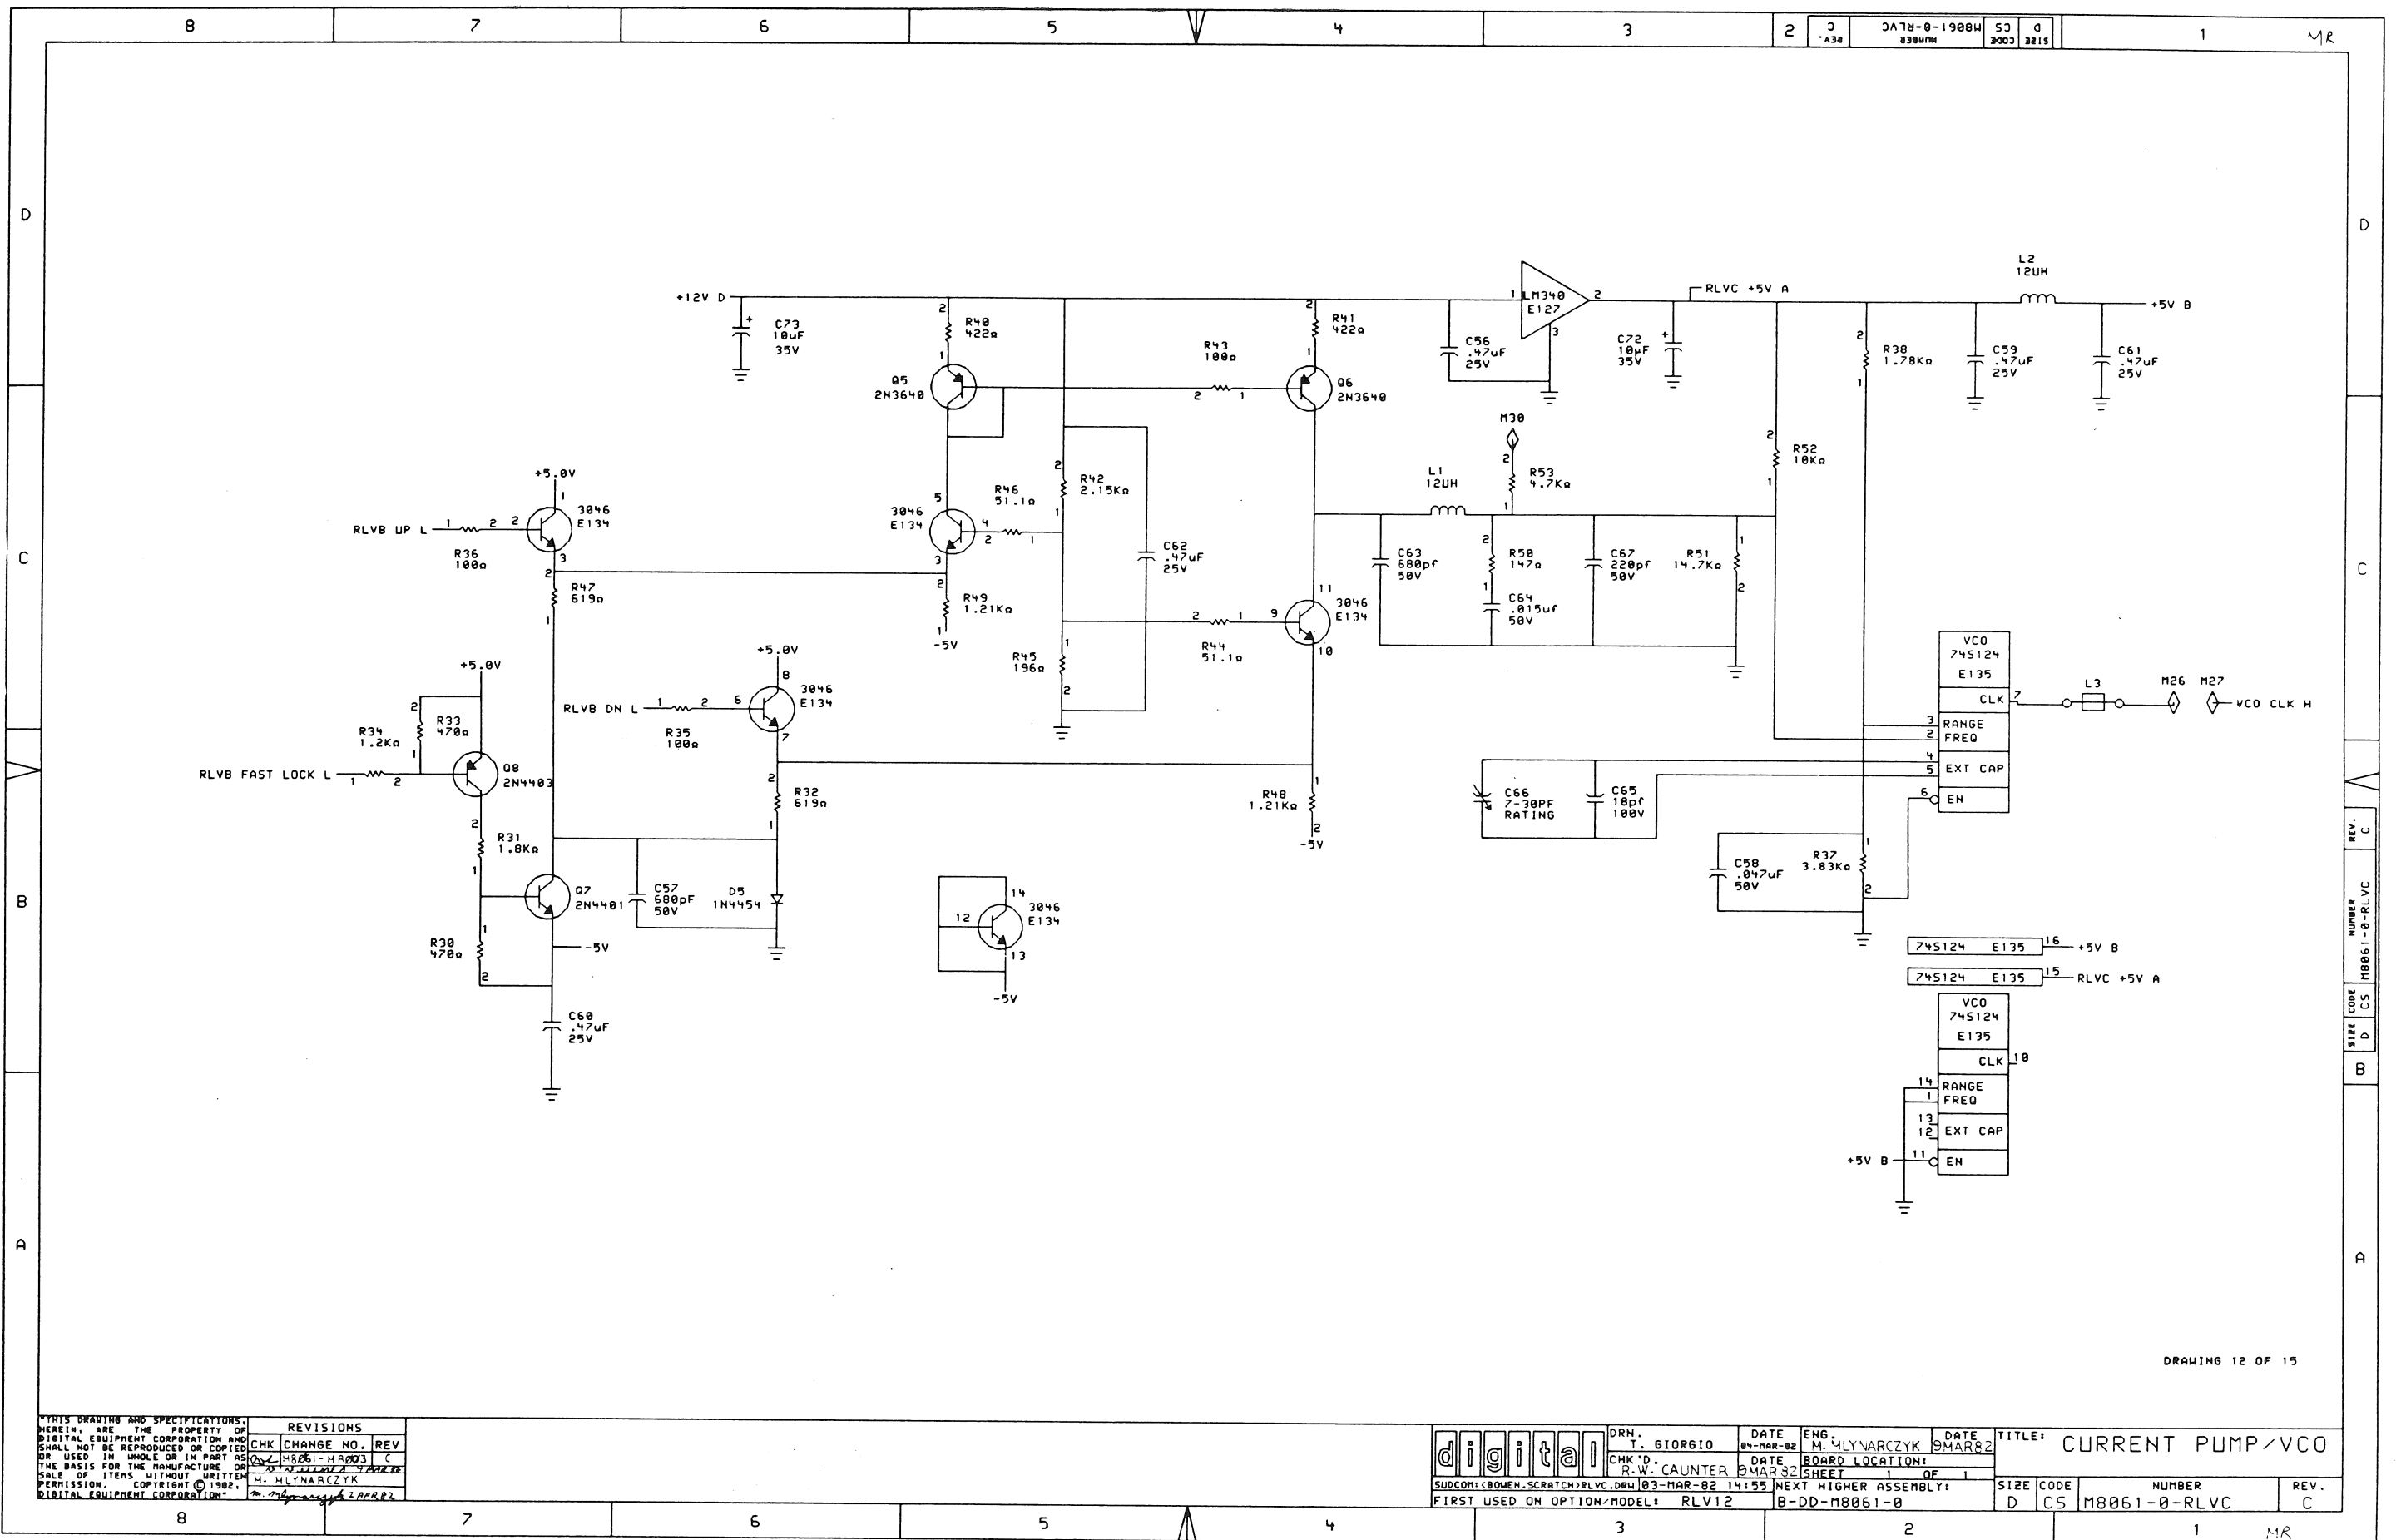



CODE	NUMBER	REV.
CS	M8061-0-RLVD	B

